

MODEL PBM-1 EMERGENCY STATION



SPECIFICATIONS

- RATED IP65, PROTECTED AGAINST DUST AND LOW PRESSURE WATER SPRAY
- RED 1.5 INCH DIAMETER MUSHROOM BUTTON
- GUARD RING IS AVAILABLE TO PROTECT MUSHROOM BUTTON
- SILKSCREENED "EMERGENCY PUSH FOR HELP"
- ONE NORMALLY-OPEN AND ONE NORMALLY-CLOSED CONTACT
- SWITCH ACTION IS MOMENTARY
- CONTACTS RATED 10 A. @ 35 VDC OR 120 VAC
- SCREW TERMINALS ON CONTACT BLOCKS
- MOUNTED ON SINGLE GANG STAINLESS STEEL WALLPLATE
- PLATE SIZE 2.75" W x 4.5" H
- DEPTH BEHIND PLATE IS TWO INCHES
- U.L. AND C.S.A. CERTIFIED COMPONENTS



ALARM CONTROLS CORPORATION

19 BRANDYWINE DRIVE P.O. BOX 280


DEER PARK, NY 11729

1 631 586-4220 1 800 645-5538

WWW.ALARMCONTROLS.COM EMAIL INFO@ALARMCONTROLS.COM

PUSHBUTTON CONTROL STATIONS

FOR
EMERGENCY / PANIC / DURESS

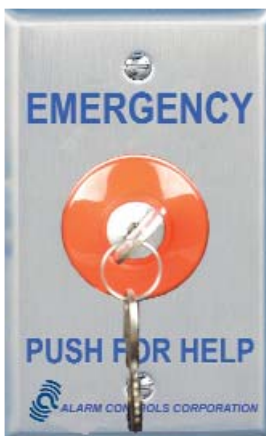

MODEL KR-1



MODEL PBM-1



MODEL PBL-1

- U.L. APPROVED AND CSA CERTIFIED COMPONENTS
- LARGE 1.5 INCH DIAMETER RED MUSHROOM BUTTON
- NORMALLY-OPEN AND NORMALLY-CLOSED CONTACTS
- CONTACTS RATED 10 AMPERES @ 35 VDC OR 120 VAC
- SWITCH IS WEATHER-PROOF TO IP65 STANDARD
- STANDARD SILKSCREENED LEGENDS
- MOUNTED ON STAINLESS STEEL WALLPLATE
- FIELD WIRING WITH SCREW TERMINALS
- CUSTOM SILKSCREENING AVAILABLE



ALARM CONTROLS CORPORATION

19 BRANDYWINE DRIVE P.O. BOX 280

DEER PARK, NY 11729

1 631 586-4220 1 800 645-5538

WWW.ALARMCONTROLS.COM EMAIL INFO@ALARMCONTROLS.COM

PUSHBUTTON CONTROL STATIONS

FOR EMERGENCY / PANIC / DURESS

MODEL	SWITCH TYPE	OPTIONS
PBM	MOMENTARY	ILLUMINATED OPERATOR, GUARD RING LAMP VOLTAGES: 6, 12, 24 VDC OR 120 VAC
PBL	LATCHING	ILLUMINATED OPERATOR, GUARD RING LAMP VOLTAGES: 6, 12, 24 VDC OR 120 VAC
KR	LATCHING, KEY RESET	GUARD RING (ILLUMINATION N/A)

ADDITIONAL OPTIONS

CUSTOM SILKSCREENING
ANY COMBINATION OF SWITCHES
A VARIETY OF PLATE FINISHES
1.75" SLIMLINE PLATE
MULTIPLE GANG PLATES

ACCESSORIES

SURFACE MOUNT BOX W/ TAMPER SWITCHES
(MODEL SMB-1)
WALLPLATE RETAINER
(MODEL WPR)
TIMER TO EXTEND CONTACT "ON" TIME
(MODEL MT-1)
HINGED COVER WITH HASP
(MODEL HC)



REAR VIEW OF SWITCH

SPECIFICATIONS

CONTACT RATING: 10 @ 35 VDC OR
120 VAC
TEMP RANGE: -25C TO 70C
SWITCH DEPTH: 2" STANDARD,
2.5" ILLUMINATED
WEATHER-PROOF: RATED TO IP65,
NEMA TYPE 1, 2, 3, 3R, 4, 4X, 5, 1
ONLY WITH 302 STAINLESS PLATE

HOW TO ORDER

SELECT TYPE OF MODEL AND CONTACT ARRANGEMENT FROM CHART BELOW
(UNLESS OTHERWISE SPECIFICIED ALL MODELS ARE MOUNTED ON 430 SERIES STAINLESS STEEL PLATES)

STANDARD MODELS

OPTIONS

MODEL	CONTACTS	PLATE	ILLUMINATION	GUARD RING
XXX	X	X	XX	XX
PBM	1 - N/O, NC	1 - 302 S.S.	L1 - 6 VDC	GR
PBL	2 - N/O, N/O	2 - WHITE	L2 - 12 VDC	
KR	3 - N/C, N/C	3 - IVORY	L3 - 24 VDC	
	4 - N/C	4 - RED	L4 - 120 VAC	
	5 - N/O	5 - 1.75" S.S.		
		6 - 1.75" RED		

EXAMPLE: PBL-1- 4-L2- GR LATCHING PUSHBUTTON WITH ONE N/O AND ONE N/C CONTACT, RED PLATE, 12VDC ILLUMINATION, GUARD RING

ALARM CONTROLS CORPORATION

"QUALITY SECURITY EQUIPMENT SINCE 1971"

19 BRANDYWINE DRIVE, P.O. BOX 280, DEER PARK, NEW YORK 11729

1 800 645-5538 631 586-4220 FAX 631 586-6500

EMAIL: INFO@ALARMCONTROLS.COM WWW.ALARMCONTROLS.COM