



PK601A 24 VDC Power Supply

IL420 Specification Sheet

Tek-ENTRY® Apartment Entry & CM800 Emergency Call Systems • Rev. 12 - 12/2013

Features

- Easy installation
- Low-voltage operation
- Multiple applications
- Precision engineering

Description

The PK601A is a 24 VDC power supply designed to power auxiliary signaling devices used in TekTone® emergency call systems. The unit provides a filtered 24 VDC output rated at 1 amp.


Although specifically designed for use with emergency call systems, the PK601A may also be used as a DC silent door opener adapter in TekTone® apartment entrance systems.

Specifications

Dimensions:	Height:	5"	(127 mm)
	Width:	2.375"	(60 mm)
	Depth:	2.25"	(57 mm)
Construction:	Quality electronic components mounted on a PC board encased in a rugged extruded aluminum housing		
Connections:	Screw terminals		
Mounting:	Surface		
Output voltage:	24 VDC		
Output current:	1 amp		
Power			
Requirements:	16 VAC, 30 VA		

Optional Components

CM800 Emergency Call System
BE007 DC Corridor Bell
LI404B Auxiliary Strobe for Hearing Impaired
PK205 Intercom Amplifier
PK612A DC Flasher

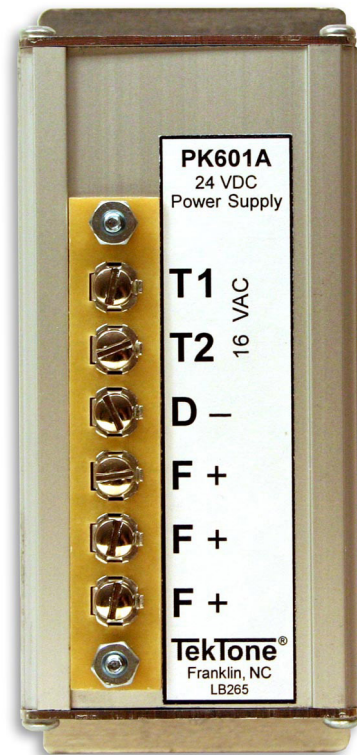

PK601A 24 VDC Power Supply

www.tektone.com

277 Industrial Park Road • Franklin, NC 28734 • tektone@tektone.net

Phone: (828) 524-9967 • Fax: (828) 524-9968 • Sales: Choose option 2 • Tech Support: Choose option 3

TekTone®'s quality system is registered by UL® to the ISO 9001 standard. (Reference #10001510.)