

PSK-3 Proximity Key Ring Tag

For use with Pyramid Series Proximity Readers

- **Smallest Proximity Key Ring Tag Available**
- **Robust and Durable - Washing Machine Tough!**
- **Works With Keri's New Pyramid Series Proximity Readers On Any Manufacturer's System**
- **Interchangeable in System with Keri Proximity Cards**
- **Industry Standard Formats**
- **Unique Codes**
- **Lifetime Warranty**



Keri's *PSK-3 Proximity Key Ring Tag* provides user convenience in a small, ergonomic, and extremely durable package. The tag is equipped with a brass eyelet for attachment to a key ring that ensures the neck of the tag will not break during the life of the system. They are for use with Keri's new *Pyramid Series Proximity Readers* which can be used in conjunction with virtually any manufacturer's access control system.

The Key Tags are sequentially encoded, and can be programmed in any custom Wiegand format as well as standard 26 bit. Each tag is marked with the ID number and a date code. They can be used interchangeably with Keri's Proximity Cards on the same system without worry about ID code duplication or format matching. Read range is typically 50% of a Standard Light Proximity Card.

Key Tags are especially convenient for building entrances where the user still has their car keys in hand. If the system has many interior doors that are secured with a Keri access control system, users often attach the tag to a necklace for easy carrying, especially if the clothing does not have pockets. If parking gates are secured by an access control system, a Keri Proximity Card is recommended because the tag is usually hanging with the keys in the ignition.



1530 Old Oakland Road, Suite 100
San Jose, CA 95112 USA
(800) 260-5265 • (408) 451-2520 • Fax (408) 441-0309
e-mail: sales@kerisys.com web: www.kerisys.com

DATA SHEET

**PSK-3 Proximity
Key Ring Tag**

PSK-3 Proximity Key Ring Tag

Specifications

Read Range*

P-300	up to 2 inches (51mm)
P-400	up to 1 inch (25mm)
P-500	up to 3 inches (76mm)
P-600	up to 2 inches (51mm)

Readers with more range available soon

Size

L=1.51, W=1.15, T=0.196 inches
Approx. (38 x 29 x 5mm)

Weight

0.16 oz
(4.5g)

Material

ABS, includes brass eyelet

Frequency

125 KHz excitation

Temperature

-40° C to +70° C

Humidity

0-100% Non-condensing

Color

Gray

Formats


Wiegand and ABA Track II magnetic stripe (clock and data)

Warranty


The Key Tag comes with a limited lifetime warranty against defects in materials and workmanship.

Specifications subject to change without notice.


Back

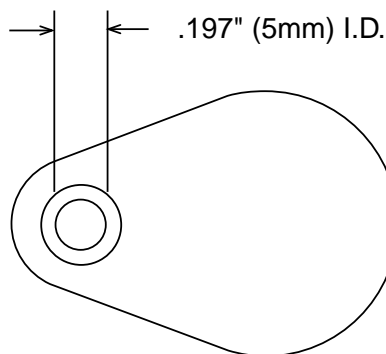

Side

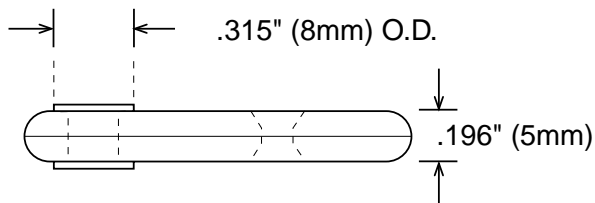

Front

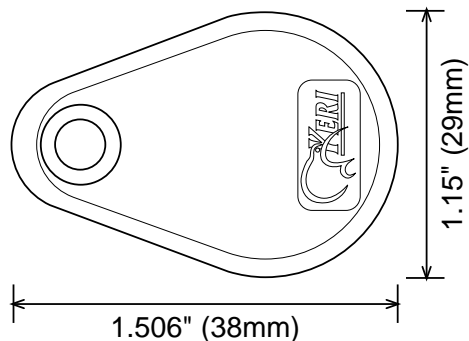

* Read range is stated in a clean RF and electrical environment with key tag presented parallel to reader surface.

All other trademarks are the property of their respective owners.

This document also serves as the data sheet for the PKT-10X and PKT-26X.

Presented By:



(800) 260-5265 • (408) 451-2520 • Fax (408) 441-0309

Sept. 1999