



RB Relay Board

The RB4 provides Normally - Open or Normally - Closed relays that can be interconnected. Ideal for interlock installations or wherever a basic relay board is used to trigger action, shunt alarms or report status from an access control system.

PRODUCT FEATURES

- 4 DPDT relays with 2 Amp contacts
- Individual coil connections - common negative or positive
- Replaces socket mount relays
- Dry contact connections via screw terminals
- Relays have low current coils (13mA at 12VDC; 8mA at 24VDC)

- Allows operation from most LED drive outputs
- MagnaCare Lifetime Replacement No Fault Warranty

Dimensions:
4"W x 3-1/2"H


Electrical Max Draw:
32mA at 12VDC or 32mA at 24VDC

Operating Temperature:
-13 to +158F [-25 to +70C]

MODELS

PART# | Description

RB-4-12	Relay Board - 12VDC
RB-4-24	Relay Board - 24VDC

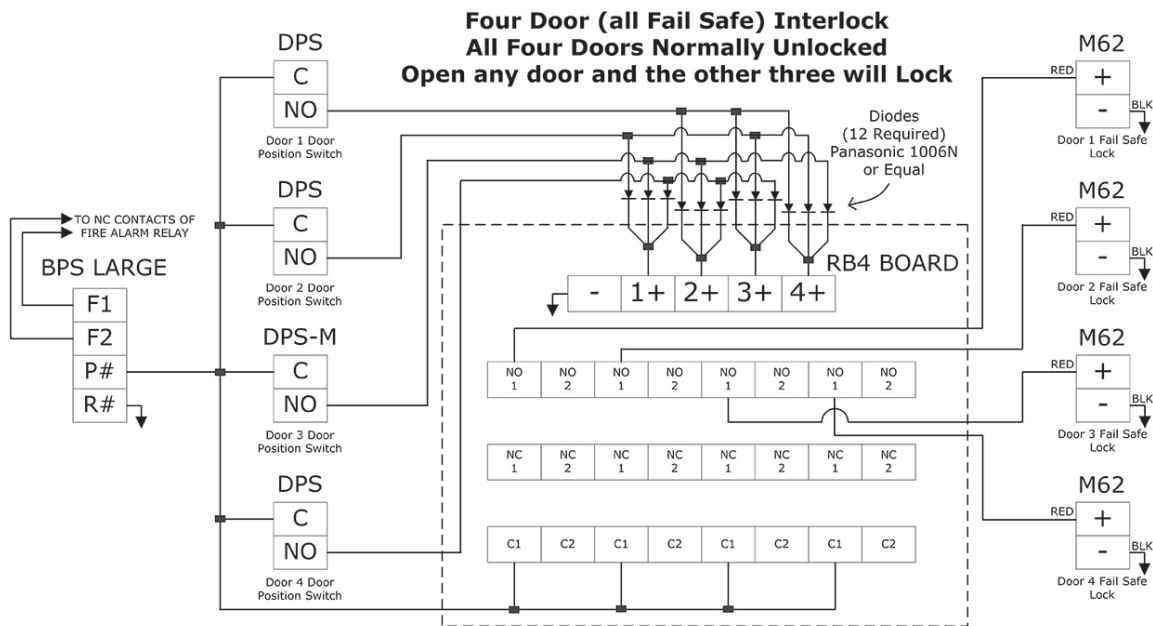

SECURITRON
ASSA ABLOY