



### PRODUCT FEATURES

- Ultra-secure Direct Mount to door frame for strength and reliability
- Fully sealed for weather-proof operations
- Sealed 10 foot [3.05m] jacketed, stranded conductor cable
- Automatic dual voltage – no field adjustment required
- Instant release circuit – no residual magnetism
- Noise suppression – no interference with sensitive electronics
- Efficient, low power usage
- All ferrous metal surfaces plated for durability and rust resistance
- Fits in 2.5" of flat space
- MagnaCare Lifetime Replacement No Fault Warranty

### PRODUCT OPTIONS

- Flexible mounting options for
  - › *Out-swing doors*
  - › *In-swing doors (-F, add to any model for Face Drilled)*
  - › *Metal, wood, Herculite or glass with aluminum frames*
  - › *Swinging and sliding gates*
- BondSTAT magnetic bond sensor – Patented (MBS)
- Integrated door position switch (DPS)
- Universal threaded conduit fitting is 1/2" female – 3/4" male
- Split Strike Plates and Offset Strike Plates
- Dress Covers

### SPECIFICATIONS

- UL 10C Listed
- CAN4-S104, CAN/ULC-S533 Listed
- ANSI/UL 294 Listed
- CSA-C22.2 No.205 Listed
- ANSI/BHMA 156.23, Grade 1; E08501-1000
- NFPA 101
- CSFM- California State Fire Marshal Approved
- MEA – City of New York Approved
- CE:EN 50091-1, EN61000-6-2
- NEMA: 4X
- IEC: IP66
- Patent: 8,094,017
- Patents Pending

**Holding Force:**  
1200lbs. [544kg]

**Dimensions:**  
**Magnalock:** 8"L x 1-3/4"D x 3"H  
**Strike:** 6"L x 1/2"D x 2-3/4"H

**Electrical:**  
250mA at 12VDC  
150mA at 24VDC

**Operating Temperature:**  
-40 to +140F [-40 to +60C]  
Indoor or Outdoor use

**Shipping Weight:**  
11lbs [5kg]

**Finishes:**  
US32D/630 – Satin Stainless Steel

# M62 SERIES

## 1200lbs Holding Force


### The Ultimate in Magnalock® Versatility for Indoor/Outdoor Higher Security

The M62 is a strong, easy-to-maintain solution for interior, perimeter and exterior access control. With unsurpassed durability, the M62 will last long after most buildings wear out. Flexible mounting options support applications for hollow metal, concrete filled metal, wood, or glass with aluminum frames, and Herculite doors. Options include single and double door configurations, or specialty applications such as gates and fences.

### » MODELS

PART # | Description

<b>M62</b>	M62 Magnalock- 12/24VDC
<b>M62B</b>	M62 Magnalock- 12/24VDC, MBS
<b>M62BD</b>	M62 Magnalock- 12/24VDC, MBS, DPS
<b>M62D</b>	M62 Magnalock- 12/24VDC, DPS
<b>M62F</b>	M62 Magnalock- 12/24VDC, Face Drilled
<b>M62FB</b>	M62 Magnalock- 12/24VDC, Face Drilled, MBS
<b>M62FBD</b>	M62 Magnalock- 12/24VDC Face Drilled, MBS, DPS
<b>M62FD</b>	M62 Magnalock- 12/24VDC, Face Drilled, DPS
<b>M62FG</b>	M62 Magnalock- 12/24VDC, Face Drilled, Gate Conduit
<b>M62FGB</b>	M62 Magnalock- 12/24VDC, Face Drilled, Gate Conduit, MBS
<b>M62FGBD</b>	M62 Magnalock- 12/24VDC, Face Drilled, Gate Conduit, MBS, DPS
<b>M62FGD</b>	M62 Magnalock- 12/24VDC, Face Drilled, DPS, Gate Conduit
<b>M62G</b>	M62 - Gate Conduit
<b>M62GB</b>	M62 - Conduit, MBS
<b>M62GBD</b>	M62 - Conduit, MBS, DPS
<b>M62GD</b>	M62 - Gate Conduit, DPS

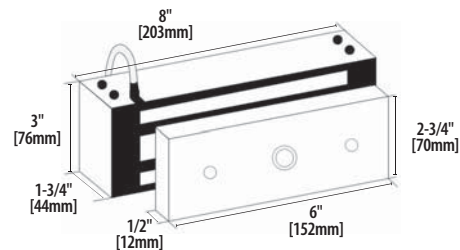

DUAL VOLTAGE



GRADE 1



FIRE RATED

SECURITRON®

ASSA ABLOY

