


DATA SHEET

COD. **SK9001I**

SIMPLEKEY ADVANCED COMPLETE UNIT- PANEL MOUNTING

Central stand-alone module + Mifare® reader to insert into Comelit housing. Watertight PVC housing. Capacity: 1500 badges per module. Programming: Badges encoded using PC software and USB encoder. Adjustable timer: 1 - 60 seconds, preset to 5 seconds

- LED indicator for operation and diagnostics. Stores the previous 1000 events. Option to have ?pass? transmitters and to manage primary and secondary doors. 1 entrance and 1 exit alarm. 12 - 24 V AC / DC power supply.

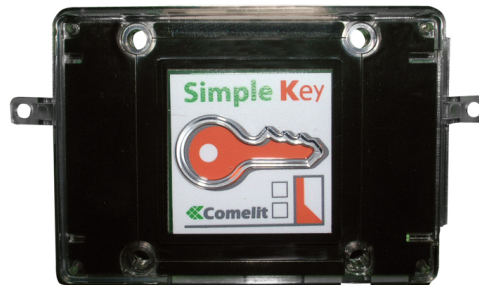

General info

Intrastat code: 85171800

Compatibility

Access Control Family: Yes

Connectivity

Alarm inputs/outputs: 1

USB 2.0 ports: Yes

Packaging

Single pack height (mm): 77

Single pack width (mm): 75

Single pack weight (Kg): 0,003

Single pack depth (mm): 130

Single pack volume (dm3): 0,75