

## 12-Inch Flexible LED Strips

SL-S212-RAQ **Red**  
 SL-S212-WAQ **White**  
 SL-S212-BAQ **Blue**  
 SL-S212-YAQ **Yellow**

### Features:

- ▶ Flexible LED Strip easily installs anywhere
- ▶ Can be cut every 3 LEDs
- ▶ Energy efficient—only 2.4W
- ▶ Emits no UV or IR radiation
- ▶ Gold-plated connector for reliability
- ▶ Connect up to 30 strips in series
- ▶ Self-adhesive backing for easy installation
- ▶ Wide 120° beam spread
- ▶ Reverse polarity protection
- ▶ Three brightness levels
- ▶ Each unit comes with one LED Strip and one 4-pin LED Adapter


### Applications:

- Visual signaling
- Fence and gate lighting\*
- Stairway and safety lighting
- Accent lighting on vehicles, doorways, cabinets, etc.
- Display and tradeshow lighting

\*Connectors must be housed or epoxied for use outdoors.

### Specifications:

Operating voltage	12VDC
Current draw per LED strip	200mA@12VDC
Current draw per 3-LED segment	50mA@12VDC
Dimensions	12"x7/16" (305x10 mm)
Number of LEDs	12
Distance between LEDs	1" (25mm)
Operating temperature	-5°~115° F (-20°~45° C)
Weight	0.4-oz (11.4g)

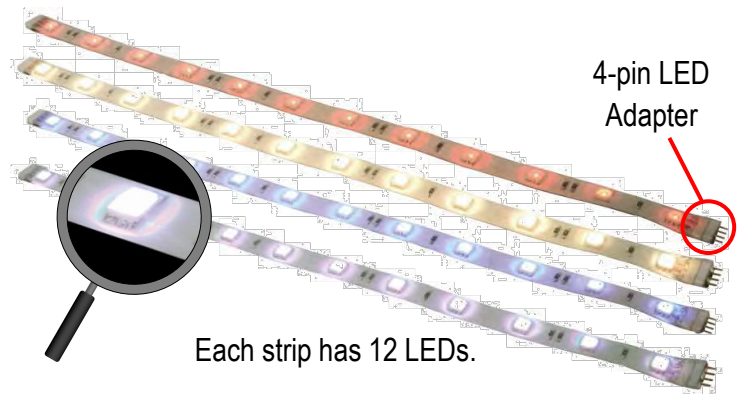

Each strip has 12 LEDs.


### Flexible Installation Options:

Connect up to 30 LED strips



4-Pin LED Adapter (1 included)

Can be cut at every 3 LEDs\*



\*Middle segments will not function on their own. Cut segments must be connected to end segments.

### Optional Accessories Available:

**LED End Cap**



SL-SAS-EC1Q  
Installs on the end of the strip to cover the connections.

**LED Strip Fastener**



SL-SAS-SH1Q  
Installs over the strip to fasten it to a mounting surface.

**LED Power Connector**



SL-SAS-PC1Q  
Plugs into the end of the strip for easy connection to power.

**SECO-LARM<sup>®</sup>**  
16842 Millikan Avenue  
Irvine, CA 92606

Tel: 1-949-261-2999  
1-800-662-0800  
Fax: 1-949-261-7326

Web: [www.seco-larm.com](http://www.seco-larm.com)  
Email: [info@seco-larm.com](mailto:info@seco-larm.com)

Copyright © 2010  
SECO-LARM U.S.A., Inc.  
All rights reserved