


MODEL SLP-6L MONITORING/CONTROL STATION



SPECIFICATIONS

- DESIGNED TO RELEASE OR SECURE AND MONITOR SIX ELECTRIC LOCKS
- SIX 1/2" RED LEDS OPERATE ON 12 OR 24 VOLTS AC OR DC
- SIX D.P.D.T. ILLUMINATED LATCHING PUSHBUTTONS WITH HI-BRIGHTNESS BUILT-IN LED
- SWITCH LED OPERATE ON 12 OR 24 VOLTS AC OR DC
- SWITCH CONTACTS RATED 3 AMPS @ 35 VDC OR 120 VAC
- COMPONENTS MOUNTED ON STANDARD THREE GANG ELECTRICAL WALLPLATE
- SWITCHES AND LEDS TERMINATED WITH COLORED LEADS
- GREEN AND YELLOW LEDS ARE AVAILABLE
- CUSTOM SWITCH LEGENDS ARE AVAILABLE
- ORDER MODEL SLP-6M FOR SWITCHES WITH MOMENTARY CONTACTS

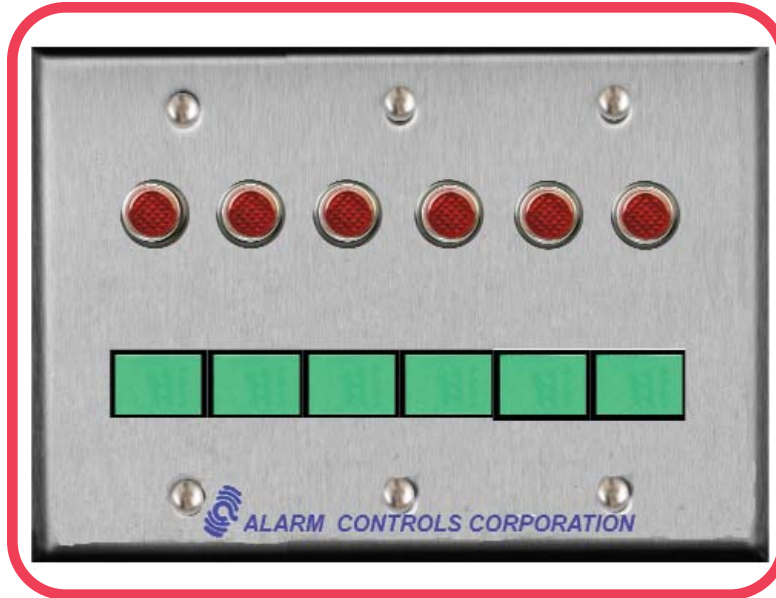

ALARM CONTROLS CORPORATION

19 BRANDYWINE DRIVE P.O. BOX 280
DEER PARK, NY 11729

1 631 586-4220 1 800 645-5538

WWW.ALARMCONTROLS.COM EMAIL INFO@ALARMCONTROLS.COM

SLP WIRING INSTRUCTIONS

SWITCH LED

OPERATES ON 12 OR 24 VOLTS
AC OR DC

YELLOW LEAD	POSITIVE
BLACK LEAD	NEGATIVE

SWITCH

RED LEAD	N/C CONTACT
BLUE LEAD	N/O CONTACT
WHITE LEAD	COM CONTACT

LED

FOR 12 VOLT OPERATION

WHITE LEAD	POSITIVE
BLACK LEAD	NEGATIVE

FOR 24 VOLT OPERATION

RED LEAD	POSITIVE
BLACK LEAD	NEGATIVE

