


Strobe, 29 Candela, Explosion Proof SM87



Description:

These certified strobes have been designed for use in harsh environmental conditions. The marine grade alloy enclosures are suitable for use offshore or onshore, where light weight combined with corrosion resistance and strength is required. Units can be painted to customer specification and fitted with identification labels.

A high temperature unit is available.

Architects and Engineers Specifications


Explosion-proof strobes shall be UL and cUL Listed for Class I, Division 1, Groups C&D, and Class I, Zone 1 hazardous locations. The strobes shall be constructed of marine grade alloy with an epoxy paint finish and shall meet NEMA 4x, NEMA6, IP 66 and IP 67 environmental requirements over a temperature range of -67°F to 158°F (-55°C to 70°C) in hazardous and harsh environments.

The strobe shall be rated to flash at 1 Hz with 5 joules per flash. Rated current draw shall not exceed 320 mA at 24 vdc. The strobe shall be capable of direct surface mounting in any direction.

Note: Due to continuous development of our products, specifications and offerings are subject to change without notice in accordance with Cooper Wheelock standard terms and conditions.

Features*:

- UL Listed for USA and Canada:
 - Class I, Div. 1, Groups C & D
 - Class I, Zone 1 AExd IIB
 - CSA Certified
 - CUL Listed
 - ATEX Approved
 - NEMA 4x & 6, IP66 and IP67
 - Certified temperature -67°F to +158°F (-55°C to +70°C)
 - High temperature unit (up to 185°F/85°C) available
 - Various lens colors
 - Optional lens guard
 - 4 wire monitored connection
 - 24 & 48 VDC
 - 110, 120, 240 & 254 VAC
 - Xenon
- *Depending on version

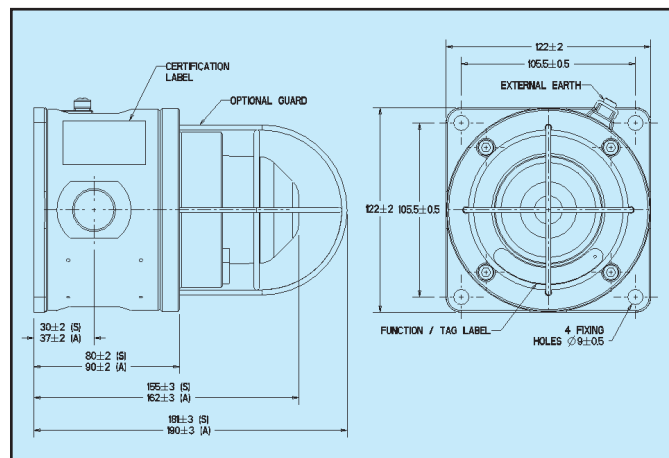

Specification

Voltage	DC		AC 50/60 Hz			
	24	48	110	120	240	254
SM87 HXB XBT Tube Energy (Joules)	5	5	6	7	7	8
Peak Current Consumption (mA)	320	170	250	275	135	150
Effective Intensity (Cd)	29	29	32	39	39	44
Peak Intensity	22213	22213	25061	30187	30187	34174
Power Consumption (Watts)	7.2	7.6	25	27	27	35

FOR COLORED LENSES

Color	Red	Blue	Amber	Green	Yellow
Multiplying Factor	0.15	0.12	0.51	0.49	0.86

Certification: UL Listed fro USA and Canada for Class I, Div I. Groups C & D and Class I, Zone 1. Listing No. E187894.
 CSA Certification to C22.2 Nos. 0, 0.4, 0.5, 9, 30-M 1986, 94-M91, 137-M 1981, Class 1, Div 1, Group 0, Enclosure 3/4, Cert. No. 96406
 ATEX approved: EN50014, EN50018, EN50019.
 Cert. No. Baseefa 03ATEX0222, EExd IIC T6

Weight: 4.4lb./2.0kg. approx.

Material: LM25 TF Marine Grade Alloy or grade 316 ANC4B stainless Steel; Finish: Epoxy paint as standard or to customer's specification; Lens - Toughened Glass

Certified

Temperature: Standard unit SM87 HXB: -67°F to +158°F (-55°C to +70°C).

High temperature unit: -67°F to +185°F (-55°C to +85°C)

Ingress

Protection: NEMA 4x & 6, IP66 & IP67

Terminals: 4 off suitable for up to 14AWG conductor size

Labels: Duty & Tag Labels optional

Entries: Up to 4 x 1/2" or 3/4" NPT

Configuration Options:

The following code is designed to help in the selection of the correct unit. Build up the reference number by inserting the code for each component into the appropriate box.

Model	Certification	Voltage	Lens/LEDcolor	Lens Guard	Entries	Tag/Duty Label	Other Options	Finish																																																																																			
<table border="1"> <thead> <tr> <th>Type</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>Xenon (alloy)</td> <td>SM87HXBA</td> </tr> <tr> <td>Xenon High Temp. (alloy)</td> <td>SM87XBTA*</td> </tr> <tr> <td>Xenon (Stainless Steel)</td> <td>SM87HXB</td> </tr> </tbody> </table>	Type	Code	Xenon (alloy)	SM87HXBA	Xenon High Temp. (alloy)	SM87XBTA*	Xenon (Stainless Steel)	SM87HXB	<table border="1"> <thead> <tr> <th>Certification</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>UL</td> <td>UL</td> </tr> <tr> <td>CSA</td> <td>C</td> </tr> </tbody> </table>	Certification	Code	UL	UL	CSA	C	<table border="1"> <thead> <tr> <th>Voltage</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>24V d.c.</td> <td>024</td> </tr> <tr> <td>48V d.c.</td> <td>048</td> </tr> <tr> <td>110V a.c.</td> <td>110</td> </tr> <tr> <td>120V a.c.</td> <td>120</td> </tr> <tr> <td>240V a.c.</td> <td>240</td> </tr> <tr> <td>254V a.c.</td> <td>254</td> </tr> </tbody> </table>	Voltage	Code	24V d.c.	024	48V d.c.	048	110V a.c.	110	120V a.c.	120	240V a.c.	240	254V a.c.	254	<table border="1"> <thead> <tr> <th>Color</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>Red</td> <td>R</td> </tr> <tr> <td>Blue</td> <td>B</td> </tr> <tr> <td>Green</td> <td>G</td> </tr> <tr> <td>Amber</td> <td>A</td> </tr> <tr> <td>Yellow</td> <td>Y</td> </tr> <tr> <td>Clear</td> <td>C</td> </tr> </tbody> </table>	Color	Code	Red	R	Blue	B	Green	G	Amber	A	Yellow	Y	Clear	C	<table border="1"> <thead> <tr> <th>Entries</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>1/2" NPT</td> <td>3</td> </tr> <tr> <td>3/4" NPT</td> <td>4</td> </tr> <tr> <td>Top</td> <td>*T</td> </tr> <tr> <td>Bottom</td> <td>*B</td> </tr> <tr> <td>RHS</td> <td>*R</td> </tr> <tr> <td>LHS</td> <td>*L</td> </tr> </tbody> </table> <p>*prefix position with entry size code.</p>	Entries	Code	1/2" NPT	3	3/4" NPT	4	Top	*T	Bottom	*B	RHS	*R	LHS	*L	<table border="1"> <thead> <tr> <th>Label</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>None</td> <td>N</td> </tr> <tr> <td>Yes*</td> <td>Y</td> </tr> </tbody> </table> <p>*(Please specify)</p>	Label	Code	None	N	Yes*	Y	<table border="1"> <thead> <tr> <th>Option</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>None</td> <td>N</td> </tr> <tr> <td>Yes*</td> <td>Y</td> </tr> </tbody> </table> <p>*(Please specify)</p>	Option	Code	None	N	Yes*	Y	<table border="1"> <thead> <tr> <th>Finish</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>Red</td> <td>R</td> </tr> <tr> <td>Blue</td> <td>B</td> </tr> <tr> <td>Yellow</td> <td>Y</td> </tr> <tr> <td>Yellow/Black Stripe</td> <td>X</td> </tr> <tr> <td>Grey</td> <td>G</td> </tr> <tr> <td>White</td> <td>W</td> </tr> <tr> <td>Special Finish</td> <td>*S</td> </tr> </tbody> </table> <p>*Please specify</p>	Finish	Code	Red	R	Blue	B	Yellow	Y	Yellow/Black Stripe	X	Grey	G	White	W	Special Finish	*S
Type	Code																																																																																										
Xenon (alloy)	SM87HXBA																																																																																										
Xenon High Temp. (alloy)	SM87XBTA*																																																																																										
Xenon (Stainless Steel)	SM87HXB																																																																																										
Certification	Code																																																																																										
UL	UL																																																																																										
CSA	C																																																																																										
Voltage	Code																																																																																										
24V d.c.	024																																																																																										
48V d.c.	048																																																																																										
110V a.c.	110																																																																																										
120V a.c.	120																																																																																										
240V a.c.	240																																																																																										
254V a.c.	254																																																																																										
Color	Code																																																																																										
Red	R																																																																																										
Blue	B																																																																																										
Green	G																																																																																										
Amber	A																																																																																										
Yellow	Y																																																																																										
Clear	C																																																																																										
Entries	Code																																																																																										
1/2" NPT	3																																																																																										
3/4" NPT	4																																																																																										
Top	*T																																																																																										
Bottom	*B																																																																																										
RHS	*R																																																																																										
LHS	*L																																																																																										
Label	Code																																																																																										
None	N																																																																																										
Yes*	Y																																																																																										
Option	Code																																																																																										
None	N																																																																																										
Yes*	Y																																																																																										
Finish	Code																																																																																										
Red	R																																																																																										
Blue	B																																																																																										
Yellow	Y																																																																																										
Yellow/Black Stripe	X																																																																																										
Grey	G																																																																																										
White	W																																																																																										
Special Finish	*S																																																																																										

Note: When placing your order, please include Supervision Diode on products.



WE ENCOURAGE AND SUPPORT NICET CERTIFICATION
 3 YEAR WARRANTY
 SM87 08/11



NJ Location
 273 Branchport Ave.
 Long Branch, NJ 07740
 P: 800-631-2148
 F: 732-222-8707
 www.coopernotification.com

Cooper Notification is Wheelock® MEDC SAFEPATH WAVES Room Secure

COOPER Notification