

The choice of professionals



SMT-2730

27" LED Monitor

- Super high resolution 600TV lines
- High contrast ratio 1000 : 1
- Fast response time 8ms
- HDMI, VGA, and composite video input
- Built-in speaker

The SMT-2730 is 27" monitor with Full HD a native 1920 x 1080 panel resolution optimized for CCTV applications and designed for 24/7 use. Benefiting from the latest onboard LED panel technology that offers excellent picture quality along with a fast 8ms response time. Offering 600TV lines high resolution and various video input via HDMI, VGA and composite, the SMT-2730 is the perfect professional security monitor.

27" LED Monitor SMT-2730




Specifications

		SMT-2730
DISPLAY		
Type	LED	
Screen Size	27"	
Max. Resolution	1,920 x 1,080	
Brightness	300cd/m²	
Contrast Ratio	1,000 : 1	
Aspect Ratio	16 : 9	
Viewing Angle (H/V)	170° / 160°	
Display Color	16.7million	
Response Time	8ms (G to G)	
Video System	NTSC / PAL	
Panel Life	30,000hours	
Filter Type	3D combfilter	
INTERFACE		
Video	Connector	BNC type (2 in / 2 out), VGA, HDMI
	Connector	Analogue D-sub (15 pin)
	Input Signal	0.7Vpp ±5%
	Available Format	640 x 350@70Hz 720 x 400@70Hz 640 x 480@60Hz/72Hz/75Hz (VGA) 800 x 600@56Hz/60Hz/72Hz/75Hz (SVGA) 1,024 x 768@60Hz/70Hz/75Hz (XGA) 1,152 x 864@75Hz 1,152 x 870@75Hz 1,280 x 960@60Hz 1,280 x 1,024@60Hz/75Hz (SXGA) 1,360 x 768@60Hz 1,600 x 1,200@60Hz 1,920 x 1,080@60Hz
HDMI	Connector	HDMI
	Available Format	640 x 480p@60Hz, 720 x 480i@60Hz, 720 x 480p@60Hz 720 x 576i@50Hz, 720 x 576p@50Hz, 1,280 x 720p@50Hz/60Hz 1,920 x 1,080i@50Hz/60Hz, 1,920 x 1,080p@50Hz/60Hz
Audio	Connector	RCA (L/R), Stereo mini jack
	Output Signal	Loop-through line level (PC only), Speakers : 2 x 1W
Application Support		Remote controller
ON SCREEN DISPLAY		
Functions	VESA™ DPM compatible	
Language	English, Spanish, French, German, Italian, Portuguese, Russian, Swedish, Turkish, Taiwanese, Chinese, Japanese, Korean, Dutch, Danish, Arabic	
GENERAL		
Electrical	Input Voltage	100 ~ 240V AC (50/60Hz)
	Power Consumption	35W
Environmental	Operating Temperature	0 ~ +40°C (+32°F ~ +104°F)
	Operating Humidity	0% ~ 90% (Non-condensing)
Mechanical	Dimensions with Stand (WxHxD)	648.0 x 479.1 x 212.0mm (25.51" x 18.86" x 8.35")
	Dimensions without Stand (WxHxD)	648.0 x 396.0 x 61.7mm (25.51" x 15.59" x 2.43")
	Bezel Size	24.3mm (0.96")
	Weight	7.3Kg (16.09lb)
	Cabinet Color	Black
	Rack Mounts	Optional
VESA Mounts Interface		100 x 100mm (3.94" x 3.94")

Dimensions

Unit : mm (inch)

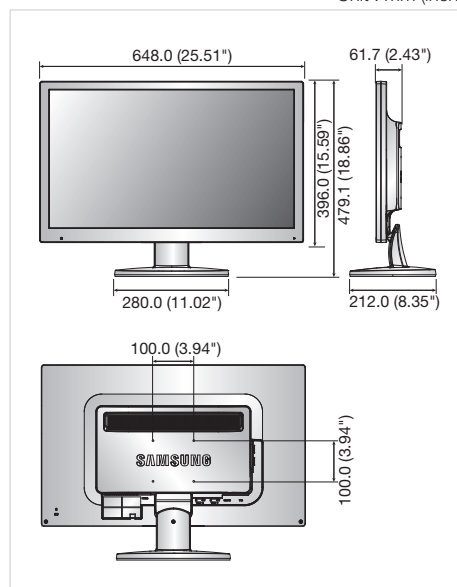

The Eco mark represents Samsung Techwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.

■ DISTRIBUTED BY



SAMSUNG TECHWIN CO., LTD.

6, Pangyo-ro 319beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, SEOUL 463-400 Rep. of KOREA
Tel : +82-70-7147-8741~8749, 8752~8760 Fax : +82-31-8018-3745 www.samsungsecurity.com www.samsungcctv.com
COPYRIGHT BY SAMSUNG TECHWIN. ALL RIGHT RESERVED

SAMSUNG TECHWIN AMERICA INC.
100 Challenger Rd. Suite 700 Ridgely Park, NJ 07660
Toll Free : +1-877-213-1222 Direct : +1-201-325-6920
Fax : +1-201-373-0124

SAMSUNG TECHWIN EUROPE LTD.
2nd Floor, No. 5 The Heights, Brooklands, Weybridge,
Surrey, KT13 0NY, UK
Tel : +44-1932-82-6700 Fax : +44-1932-82-6701

SHANGHAI SAMSUNG TECHWIN CO., LTD.
32F, Bk B, International Business Center,
No. 391 Guiping Rd., Shanghai, China, 200233
Tel : +86-21-5427-1155 Fax : +86-21-5423-5122

Design and specifications are subject to change without notice.



SAMSUNG TECHWIN