

SNV-1080R

VGA Vandal-Resistant Network IR Dome Camera




Key Features

- Max. 30fps at VGA resolution
- 2.2 ~ 7.7mm (3.5x) varifocal lens
- H.264, MJPEG dual codec
- Multiple streaming
- PoE, SD memory, IP66, Bi-directional audio support, IR LED (12ea)
- Face detection

Dimensions

Unit : mm (inch)

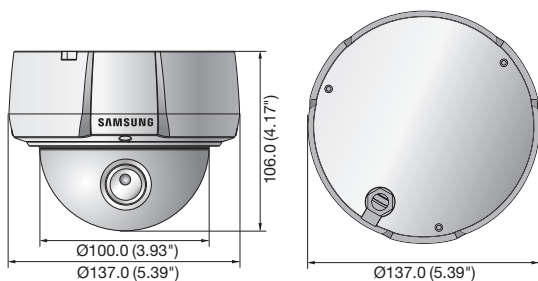

Accessories (Optional)



SBP-300WM1 SBP-300WM SBP-300CM SBP-300HM2 SBP-300LM SBP-300PM SBP-300KM

Technical Specifications

	SNV-1080RN	SNV-1080RP
VIDEO		
Imaging Device	1/4" PS CMOS	
Total Pixels	680(H) x 512(V)	
Effective Pixels	640(H) x 480(V)	
Scanning System	Progressive	
Min. Illumination	Color : 0.7Lux (F1.2, 50IRE), B/W : 0Lux (F1.2, 50IRE, IR LED on)	
S / N Ratio	50dB	
Video Out	DIP connector type, for installation	
LENS		
Focal Length (Zoom Ratio)	2.2 ~ 7.7mm (3.5x) varifocal	
Max. Aperture Ratio	F1.2	
Angular Field of View	H : 94°(Wide) ~ 26.5°(Tele), V : 70°(Wide) ~ 20°(Tele)	
Min. Object Distance	500mm (1.64ft)	
Mount Type	Board type (Ø14)	
PAN / TILT / ROTATE		
Pan Range	0° ~ 355°	
Tilt Range	17° ~ 90°	
Rotate Range	0° ~ 355°	
OPERATIONAL		
IR LED	12ea	
Viewable Length	15m (49.21ft)	
Camera Title	Off / On (Displayed up to 15 characters)	
Day & Night	Auto (S/W) / Color / B/W / External	
Backlight Compensation	Off / BLC	
Contrast Enhancement	SSDR (Samsung Super Dynamic Range) (Off / On)	
Digital Noise Reduction	SSNRIII (2D+3D noise filter) (Off / On)	
Motion Detection	Off / On (4 programmable zones)	
Privacy Masking	Off / On (32ea 4 points polygonal)	
Sens-up (Frame Integration)	Off / Auto (2x ~ 60x)	
Gain Control	Off / Low / Medium / High	
White Balance	ATW / AWC / Manual / Indoor / Outdoor	
Electronic Shutter Speed	Auto / A.FLK / Manual (60x ~ 1/12000sec)	
Flip / Mirror	Off / On	
Intelligent Video Analytics	Face detection	
Alarm I/O	Input 1ea	
NETWORK		
Ethernet	RJ-45 (10/100BASE-T)	
Video Compression Format	H.264, MJPEG	
Resolution	640 x 480 / 320 x 240 / 160 x 120	
Max. Framerate	Max. 30fps at all resolutions	
Video Quality Adjustment	H.264 : Compression level, Target bitrate level control MJPEG : Quality level control	
Bitrate Control Method	H.264 : CBR or VBR, MJPEG : VBR	
Streaming Capability	Multiple streaming (Up to 10 profiles)	
Audio I/O	Mic/Line in , Line out	
Audio Compression Format	G.711 u-law	
Audio Communication	Bi-directional audio	
IP	IPv4, IPv6	
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTSP, NTP, HTTP, HTTPS, SSL, DHCP, PPPoE FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS	
Security	HTTPS(SSL) login authentication, Digest login authentication IP address filtering, User access log, 802.1x Authentication	
Streaming Method	Unicast / Multicast	
Max. User Access	10 users at unicast mode	
Memory Slot	Micro SD/SDHC memory slot	
ONVIF Conformance	Yes	
Webpage Language	English, French, German, Spanish, Italian, Chinese, Korean, Russian, Japanese, Swedish Danish, Portuguese, Turkish, Polish, Czech, Rumanian, Serbian, Dutch, Croatian, Hungarian, Greek	
Web Viewer	Supported OS : Windows XP / VISTA / 7, MAC OS Supported Browser : Internet Explorer 7.0/8.0, Firefox, Google Chrome, Apple Safari	
Central Management Software	NET-i viewer	
ENVIRONMENTAL		
Operating Temperature / Humidity	-10°C ~ +50°C (+14°F ~ +122°F) / 20% ~ 80% RH	
Ingress Protection	IP66 Grade (Waterproof)	
ELECTRICAL		
Input Voltage / Current	12V DC / PoE (IEEE802.3af)	
Power Consumption	Max.3.4W (12V DC), Max.4W (PoE)	
MECHANICAL		
Color / Material	Ivory / Aluminum	
Dimensions (WxH)	Ø137.0 x 106.0mm (Ø5.39" x 4.17")	
Weight	786g (1.73 lb)	

* The latest product information / specification can be found at www.samsungsecurity.com