


Miniature Pinhole Camera with On-Screen Display Functions

CVC770PHSCS 3.7mm conical pinhole lens, black housing

Features

- 1/3" Sony Super HAD II™ CCD
- Day/Night - select color, BW or auto
- Camera Titles - up to 15 characters
- Mirror Image - horizontal
- OSD control of all major camera functions
- Privacy Screens - up to 4 zones
- Perfect for use in tight spaces like ATMs
- Mounting bracket included
- 5 year warranty

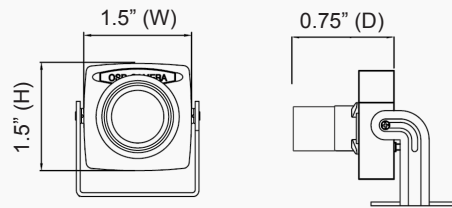

Specifications

Image Sensor 1/3" Sony Super HAD II™ CCD
 Resolution.....540 TV lines
 Minimum Illumination.....0.1 lux
 Effective Pixels768 (H) x 494 (V)
 Total Pixels811 (H) x 508 (V)
 Electronic Shutter Speed.....Auto (1/60 sec. - 1/100,000 sec.)
 S/N Ratio52dB (AGC off, weight on)
 Scanning System.....2:1 interlace
 SynchronizationInternal
 Backlight Compensation.....On / Off (adjustable)
 White BalanceATW / AWB / Manual / Fixed
 AGC.....On / Off (adjustable)
 OSD.....Available
 Motion Detection.....On / Off (8 x 8 grid)

Privacy FunctionOn / Off (4 zone)
 MirrorOn / Off
 Sharpness0 - 31' (level adjustable)
 Day/Night.....Color / BW / Auto
 Power Consumption 120mA (max.) ±10%
 Power Supply 12VDC (power supply not included)
 Operating Temperature/
 Humidity.....-14° F – 120° F / RH 95% max.
 Storage Temperature/
 Humidity.....-30° F – 140° F / RH 95% max.
 Dimensions.....1.5" (W) x 1.5" (H) x 0.75" (D)
 Weight3 oz.



Speco Technologies is constantly developing and improving products. We reserve the right to modify product design and specifications without notice and without incurring any obligation.
 Spec Rev. 2/12/14

Optional Accessory



PSW5
12VDC
Power Supply