


## Intense-IR Series Weather Resistant Color Day/Night Bullet Camera

**CVC5715DNV** 4-9mm auto iris varifocal lens, dark grey housing

**CVC5715DNVW** 4-9mm auto iris varifocal lens, white housing

### Features

- 1/3" Sony Super HAD II™ CCD
- 600 TV lines of resolution
- True Day/Night capability
- 3DNR - sharp image under ultra low light level
- Intense-IR function - non-saturated, vivid image
- Defect function - elimination of white spots
- HSBLC (High Light Suppression BLC)
- Privacy zone
- Two heaters to stop condensation
- Third-Generation DSP chip
- ICR - Removable IR cut filter
- Full OSD operation
- 32x digital zoom
- External control rings for easy focus and distance adjustment
- 12VDC / 24VAC dual voltage operation
- 5 year warranty

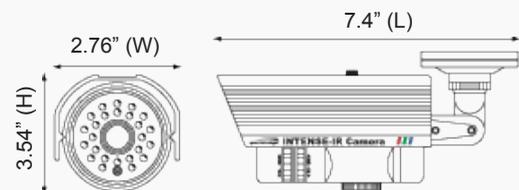

### Specifications

Image Sensor ..... 1/3" Sony Super HAD II™ CCD  
 Resolution.....600 TV lines  
 Minimum Illumination.....0.000006 lux (IR LEDs on)  
 Effective Pixels .....768 (H) x 494 (V)  
 Total Pixels .....811 (H) x 508 (V)  
 Number of IR LEDs ..... 14  
 IR Range .....Up to 49 ft. (depending on scene reflection)  
 IR LED Wavelength .....850nm  
 White Balance .....ATW / AWB / Manual / AWC - Set  
 AGC.....High / Middle / Low / Off  
 Backlight Compensation.....BLC / HSBLC / Off  
 Electronic Shutter Speed.....Auto (1/50, 1/60 sec. - 1/100,000 sec.)  
 OSD.....Available  
 3DNR.....On / Off (1 - 50 levels adjustable)  
 DWDR .....Indoor / Outdoor / Off  
 Sharpness .....0 - 31' (level adjustable)  
 Privacy.....On / Off (8 zones)  
 Scanning System.....2:1 interlace

Synchronization.....Internal / Line-Lock  
 Motion Detection.....On / Off (4 zones, alarm output)  
 Sense-Up.....Off / Auto (selectable limit x2 - x256)  
 Mirror .....Mirror / V-Rev / Rotate / Off  
 Freeze .....On / Off  
 Day/Night.....Color / BW / Auto  
 Digital Zoom .....On (32x) / Off  
 Defect Compensation.....256 points  
 Power Supply .....12VDC / 24VAC dual voltage operation  
 (power supply not included)  
 Power Consumption .....IR LEDs on: 300mA (max.)  
 Operating Temperature/  
 Humidity.....- 4° F – 140° F / RH 95% max.  
 Storage Temperature/  
 Humidity.....- 4° F – 140° F / RH 95% max.  
 Dimensions.....2.76" (W) x 3.54" (H) x 7.4" (L)  
 Weight .....1.32 lbs.



Speco Technologies is constantly developing and improving products. We reserve the right to modify product design and specifications without notice and without incurring any obligation.  
 Spec Rev. 5/30/13

### Optional Accessories



**INTCM**  
Corner/Pole  
Adaptor



**PSW4**  
24VAC  
Power Supply



**PSW5**  
12VDC  
Power Supply