


Intensifier3® Indoor/Outdoor Bullet IP Camera

See Color In Almost Complete Darkness Without IR LEDs

OINT56B1G 2.8-12mm auto iris varifocal lens, dark grey housing

Features

- Amplify existing light with no distance limitations
- No problems caused by objects that reflect or absorb IR light sources
- Minimum illumination 0.00002 lux (Intensifier3® @ 512x)
- External controls for zoom and focus
- Supports up to D1 resolution @ 30fps
- Supports H.264 and MJPEG codecs
- 2-way audio communication
- IP67 compliant
- ONVIF Profile S listed*
- 2 year warranty

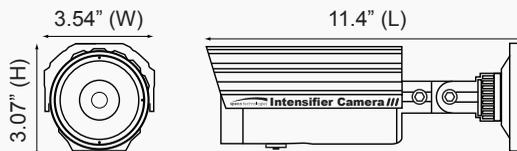

Camera Specifications

Image Sensor.....	1/3" Sony Super HAD II™ CCD
Maximum Resolution	704x480
Minimum Illumination	CDS off: 0.15 lux, CDS on: 0.00002 lux
White Balance	ATW / Indoor / Outdoor / Manual
Exposure Control	Yes
Digital Slow Shutter.....	Yes
WDR/BLC.....	BLC
Day/Night	Yes
DNR.....	On / Off
Intensifier3®.....	Auto / Off (selectable 2x – 512x)

Video Specifications

Supported Resolutions.....	704x480 / 640x480 / 704x240 / 352x240 / 176x112 @ 30fps
Compression	H.264, MJPEG
Bitrate Control	VBR, CBR
Multiple Streaming	5 simultaneous profiles

Audio Specifications

Mono Input	64Kbps G.711
Mono Output	64Kbps G.711

External Terminal Specifications

Ethernet.....	10/100 Mbps
Alarm	1 sensor input, 1 relay output
Video	Analog test output
Audio	1 mic in, 1 line out (3.5mm)
Power	DC jack

Network Specifications

Protocols	IPv4, IPv6, TCP, UDP, RTCP, RTP, RTSP, HTTP, HTTPS, SMTP, FTP, DHCP, UPnP, NTP, DNS
-----------------	---

Network Specifications (continued)

DDNS Support	Speco DDNS (free of charge)
Security	User ID & Password protection, IP address filtering, HTTPS, digest authentication, user access log
User Access	8 simultaneous users at D1 resolution Number of users may vary depending on resolution

System Specifications

Analytics	Motion detection (3 regions), audio detection
Alarm Triggers	Analytics & sensor input
Alarm Events	FTP video file upload, email image upload, alarm out

Video Buffer	Configurable pre-record & post-record
Image Settings.....	Text overlay, privacy mask

Client Specifications

Web Browser Support	Windows (Internet Explorer 8 and up)
Mobile Apps.....	Speco OnSIP (iPhone®, iPad® and Android™)
PC Application	Speco NVR, SecureGuard®

Operating & Unit Specifications

Power Supply	12VDC (power supply not included)
Power Consumption	6W
Operating Temperature.....	-13° F – 122° F
Operating Humidity.....	8% – 80% RH
Unit Dimensions	3.54" (W) x 3.07" (H) x 11.4" (L); Mounting plate diameter 3.9"
Unit Weight.....	2.6 lbs.
Certifications.....	FCC, RoHS
Included in Package	Unit, CD (manual, software), mounting screws, L wrench, test monitor cable

Free Apps with support for view on most smart devices

*Visit www.specotech.com/onvif.html for latest ONVIF support
iPhone and iPad are trademarks of Apple Inc., registered in the U.S. and other countries. Android is a trademark of Google Inc. Speco Technologies is constantly developing and improving products. We reserve the right to modify product design and specifications without notice and without incurring any obligation. Spec Rev. 1/16/14



Optional Accessories

