STI Break Glass Stopper®



NOTE: Glass is clear — only appears dark for photo purposes.

PRODUCT OVERVIEW

Accepted by many fire marshals, these versions of the world famous STI Stopper® II are designed for areas where a "break glass" cover is specified, such as unsupervised areas. Each device consists of a red polycarbonate cover, mounting frame, a pane of single-strength clear glass (easily replaced when broken), a glass-breaking bar, screws and anchors for installation. Gaskets are also available to improve weather resistance.

HOW IT WORKS

Three models are available for fire, the smaller STI-6100, the larger STI-4100 and the STI-4130 for surface mount; the STI-4130 is the SUB-900-R conduit spacer and the STI-4100, the spacer will add two inches of depth and accommodate up to ¾" conduit. A fourth "generic" model (STI-6700) is available to cover devices other than manual pull stations. The same size as the STI-6100, it includes a wall mount hanging clip for keys, etc. This model for non-fire applications simply says, "BREAK GLASS."

FEATURES

- Housing is molded of super tough polycarbonate material.
- · Aesthetically appealing.
- · Fire alarm remains clearly visible and accessible.
- · Fast, easy installation.
- Glass replacement is simple.
 Suggestion: Order extra panes with each unit, for immediate replacement.
- Accepted by many fire marshals. Obtain local fire marshal approval prior to installation.
- Gaskets available to improve weather resistance.
- Typical working properties of polycarbonate are -40° to 250°F (-40° to 121°C).
- Three year guarantee against breakage of polycarbonate in normal use.



STI Break Glass Stopper®

Dimensions and Technical Information

MODELS AVAILABLE

STI-4100 Break Glass Stopper - large

STI-4130 Kit containing both STI-4100 and SUB-900-R

STI-6100 Break Glass Stopper - small STI-6700 Break Glass Stopper Keys Under Glass

SUB-08 Replacement Break Glass Tool

Replacement Glass for STI-6100 **SUB-09 SUB-10** Replacement Glass for STI-4100

Replacement Glass for STI-6700 - Reads "Break Glass" **SUB-67**

SUB-900-R 2" Conduit Spacer (red) for STI-4100

STI-6702 Tamperproof Screw Kit STI-1280 Backplate for STI-4100 STI-3002 Weather Gasket - large* STI-3003 Conduit Gasket 1/2" STI-6501 Weather Gasket - small*

*Gaskets may need to be trimmed prior to installation.


ACCESSSORIES

Several accessories are available for the Break Glass Stopper. They include a polycarbonate mounting backplate (recommended for all installations with irregular mounting surfaces), additional spacer for stations with greater depth or exposed conduit and tamperproof screws (STI-4100 only).

NOTE: Local fire marshal approval should be obtained prior to installation.

WARRANTY

Three year guarantee against breakage of polycarbonate in normal use.

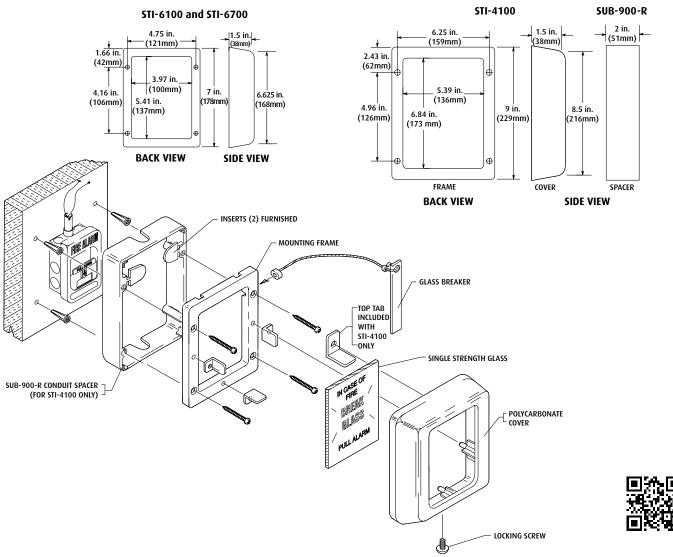





2306 Airport Road 48327, USA

Tel: 248-673-9898 Fax: 248-673-1246 Toll-free: 800-888-4784 info@sti-usa.com www.sti-usa.com

Unit 49G Pipers Road Park Farm Industrial Estate Redditch, Worcestershire B98 OHU England

Tel: 44 (0) 1527 520 999 Fax: 44 (0) 1527 501 999 Free: 0800 085 1678 (UK) www.sti-europe.com