


STI Heater Kit

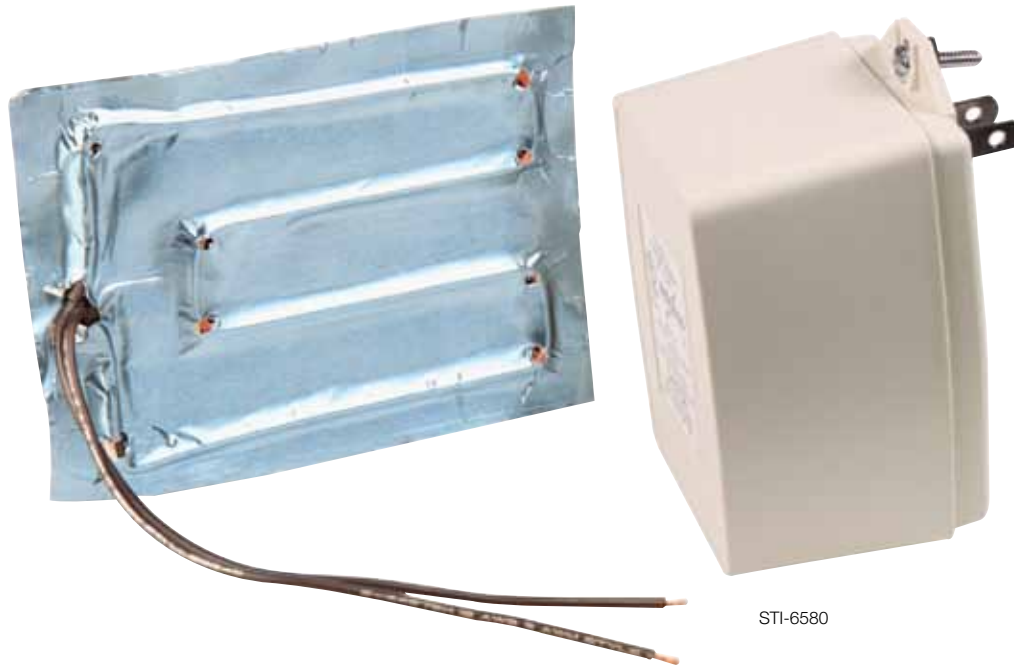

STI-6580

PRODUCT OVERVIEW

These easy to install kits are the answer for protecting expensive electronic units that must be installed in low temperature areas, indoors or outdoors. In addition to assuring continued operation of protected units, they also keep LCD's from becoming sluggish and help them stay visible.

HOW IT WORKS

The 12-volt system (STI-6580) incorporates a 12-volt transformer and is rated at 25 watts. The 24-volt system (STI-6583) is designed to get its power directly from a remote power supply (other than the fire panel) or CCTV power source and is rated at 8 watts. Both systems include a foil heater pad with adhesive backing and a thermostat. Kits are designed for use in an enclosed space or protective cover.

FEATURES

- Allows critical electronic components to operate at low temperatures.
- Self-adhesive heater pad.
- Keeps electronic components warm when mounted in a protective cover or enclosed space. Results may vary based on installation and enclosure used.
- Temperature controlled.
- Thermostat opens at 23° and closes at 41°F (-5° to 5°C).
- Both 12-volt and 24-volt models available.
- Can be mounted inside control panels to keep batteries and electronics operational.
- Keeps LCD's from becoming sluggish and helps them stay visible at freezing temperatures.
- Easy to install and highly effective.
- One (1) year warranty from the date of original purchase.

STI Heater Kit

Dimensions and Technical Information

MODELS AVAILABLE

STI-6580 12 volt heater Kit
STI-6583 24 volt heater Kit

SPECIFICATIONS

Heater Pad Size 4" x 5 1/2"


Thermostat Size 3/4" x 1/4" x 3/16"

Thermostat Active Opens at 23°F and closes at 41°F (-5°C to 5°C)
Creep action thermostat

STI-6580 power 12 Volt 25 Watts (2.25 amp) AC or DC 40 VA 12
VAC power supply included

STI-6583 power 24 Volt 8 Watts (.5 amp) AC or DC power
supply not included

NOTE: Keeps electronic components warm when mounted in a protective cover or enclosed space. Results may vary based on installation and enclosure used. Not polarity sensitive.

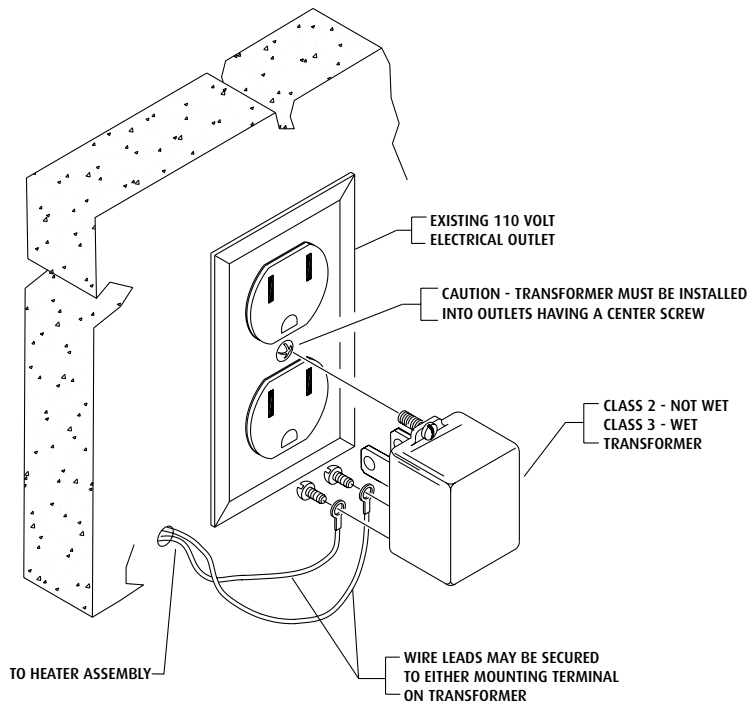

**Safety Technology
International, Inc.**

2306 Airport Road
Waterford, Michigan
48327, USA

Tel: 248-673-9898
Fax: 248-673-1246
Toll-free: 800-888-4784
info@sti-usa.com
www.sti-usa.com

Unit 49G Pipers Road
Park Farm Industrial Estate
Redditch, Worcestershire
B98 0HU England

Tel: 44 (0) 1527 520 999
Fax: 44 (0) 1527 501 999
Free: 0800 085 1678 (UK)
www.sti-europe.com