

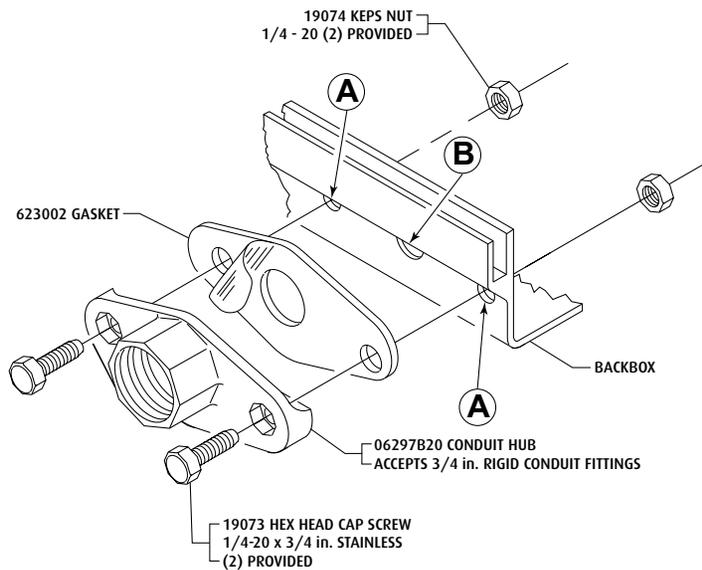


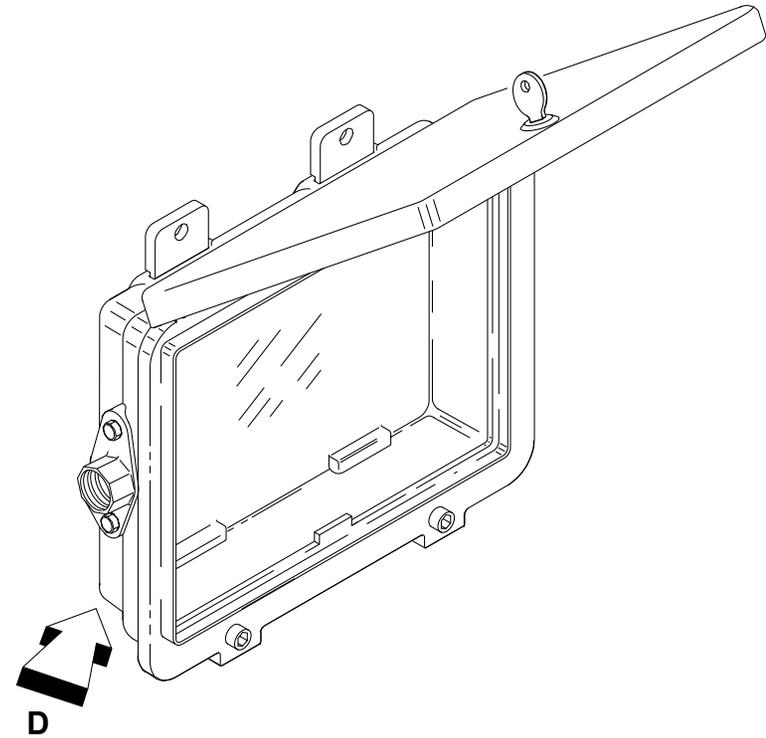

Safety Technology International, Inc.
2306 Airport Road • Waterford, Michigan 48327-1209
Phone: 248-673-9898 • Fax: 248-673-1246
Toll Free: 800-888-4784 • E-mail: info@sti-usa.com
Web: www.sti-usa.com

Safety Technology International (Europe) Ltd.
Unit 49G Pipers Road • Park Farm Industrial Estate • Redditch
Worcestershire • B98 0HU • England
Tel: 44 (0) 1527 520 999 • Fax: 44 (0) 1527 501 999
E-mail: info@sti-europe.com • Web: www.sti-europe.com

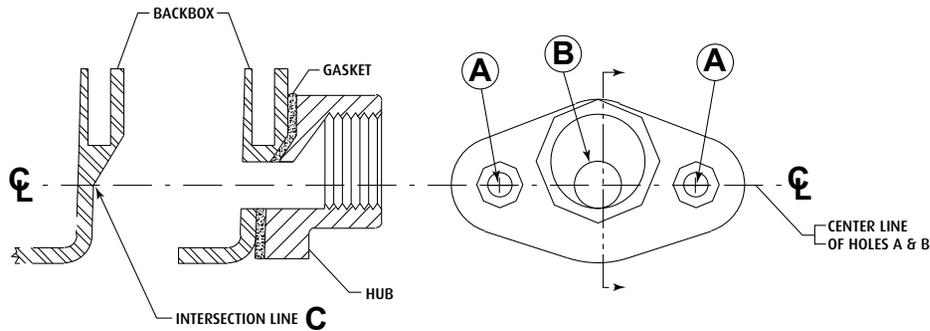

VIEW IN DIRECTIONS OF ARROW **D**

INSTALLATION INSTRUCTIONS - REFER TO EXPLODED VIEW

1. Remove the backing paper from the gasket and attach it to the back of the hub.
2. Select the location on the back box where conduit hub is to be mounted.
3. Align the center of holes A & B directly on intersection line C.
4. Using a pointed tool, mark a center point in the center of holes A & B on the intersection line C.
5. Drill three (3) holes: Hole A 7/32 in. diameter, Hole B 1/2 in. diameter.
6. Complete installation as shown.

Electronic warranty form at www.sti-usa.com/wc14

INSTALLATION OF SUB-6297B20 CONDUIT HUB ASSEMBLY

All specifications and information shown were current as of publication and are subject to change without notice.

SUB-6297IS APRIL2006

