

SVS-5R/5E

RAID 5 Unit / HDD Extension Unit



Key Features

SVS-5R



- 1U 19-inch rack case
- Data transmission speed : up to 3.0Gbps (SATA II)
- Available SATA HDD : up to 4 (4TB)

SVS-5E

- 1U 19-inch rack case
- Data transmission speed : up to 3.0Gbps (SATA II)
- Available SATA HDD : up to 4 (4TB)

Dimensions

Unit : mm (inch)

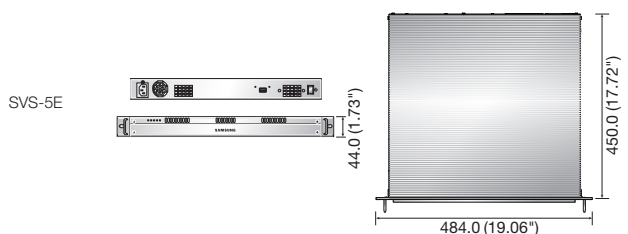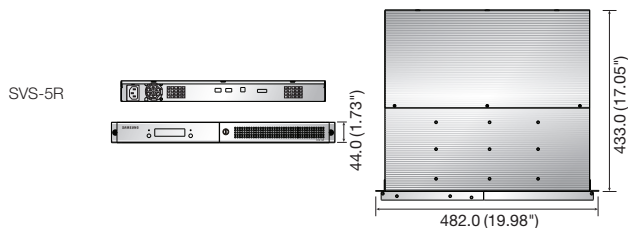

Technical Specifications

	SVS-5R	SVS-5E
Transmission Speed	Up to 3.0Gbps (SATA II)	
Maximum Capacity	Up to 4TB	
Internal HDD	Up to 4 SATA HDDs (Support hot-swap function)	Up to 4 SATA HDDs
RAID	RAID 0, 1, 0+1, 5	N/A
eSATA	1 External SATA ports for DVR connection	
USB	USB 2.0, RAID configuration only	N/A
Operating Temperature	+5°C ~ +45°C (+41°F ~ +113°F)	
Operating Humidity	20% ~ 70% RH	
Input Voltage	115 ~ 230V AC ±10%, 50/60Hz, Autoranging	
Dimensions (WxHxD)	482.0 x 44.0 x 433.0mm (19.98" x 1.73" x 17.05")	484.0 x 44.0 x 450.0mm (19.06" x 1.73" x 17.72")
Weight	Approx. 6.4Kg (14.1 lb)	Approx. 5.6Kg (12.3 lb)
Rack Mount Kit	For mounting one unit in an EIA 19-inch rack	
Certifications	FCC (Class A), UL/cUL listed, CE (Class A)	

* The latest product information / specification can be found at www.samsungsecurity.com

Supported Models

SVS-5R

- SVR-3200/1680/1645/960/945
- SRD-1670/1670D(C)/1650/1650D(C)/870/870D(C)/850/850D(C)