

Specifications:

Input:

- 115VAC 50/60Hz, 0.95 amp.

Output:

- 24VAC @ 4 amp or 28VAC @ 3.5 amp supply current.
- In-line fuse rated @ 3.5 amp/250V.
220VAC models are available upon request.

Installation Instructions:



1. Mount T2428100C in a desired location.
2. Connect the AC (115VAC 50/60 Hz) to the black and white flying leads of the transformer (*Fig. 1*).
3. Measure output voltage before connecting device.
This helps avoiding potential damage.

WARNING: This installation should be made by qualified service personnel and should conform to all local codes and in accordance with the National Electrical Codes.

Enclosure Dimensions (H x W x D) (approximate):

5.625" (142.88mm) x 7" (177.8mm) x 4.5" (114.3mm)

Low Voltage AC Output

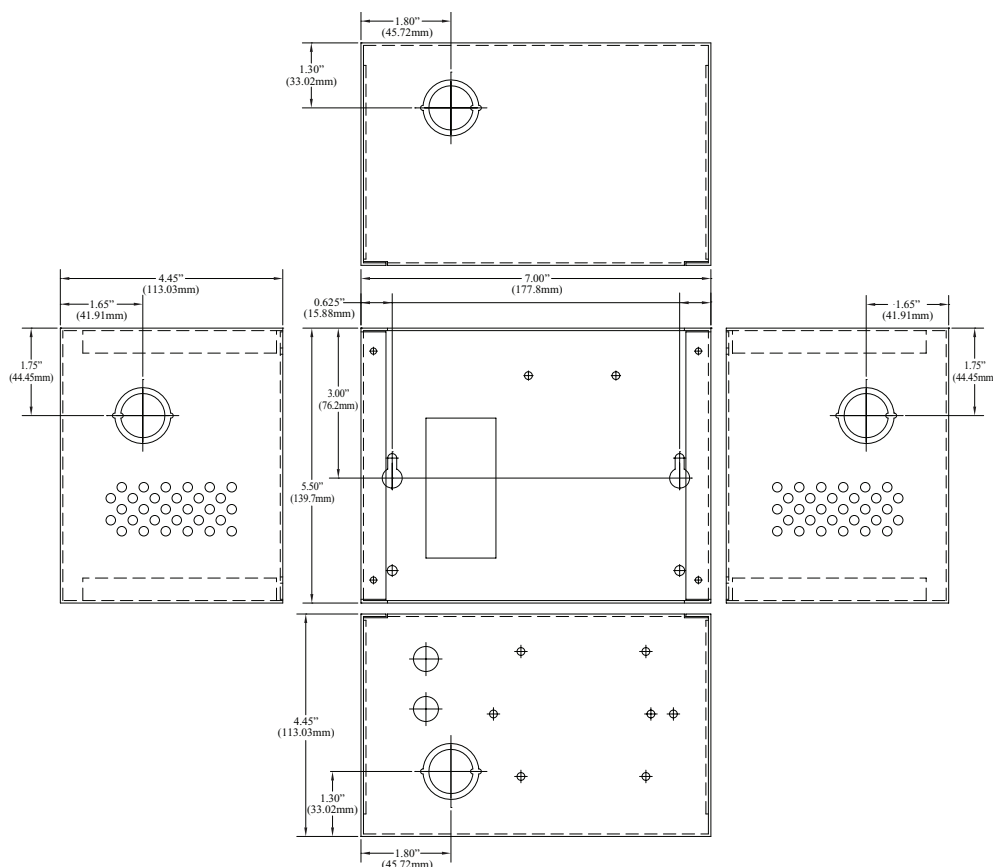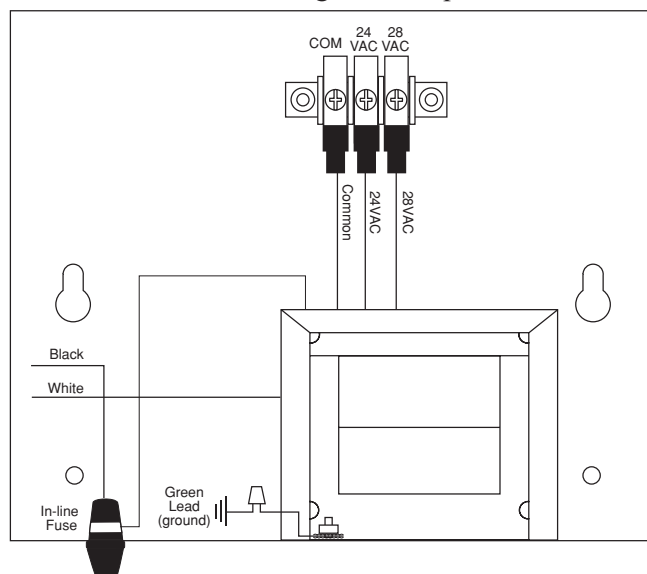

Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.