

MODEL TS-10



- VANDAL RESISTANT .75 INCH DIA. BRASS NICKEL PLATED PUSHBUTTON
- LABELED “*PUSH TO EXIT*”
- MOMENTARY ACTION SWITCH
- D.P.D.T. CONTACTS RATED 10A.@35 VDC
- SWITCH TERMINATED WITH 10” LEADS
- RED, GREEN LEDS OPERATE ON 12 OR 24 VDC
- SWITCH MOUNTED ON SINGLE GANG 430 STAINLESS STEEL WALLPLATE
- SWITCH DEPTH 1.5 INCHES BEHIND PLATE
- CONFORMS TO U.L. STANDARD 294 FOR ACCESS CONTROL, U.L. FILE NUMBER SA32686



ALARM CONTROLS CORPORATION
19 BRANDYWINE DRIVE DEER PARK, NY 11729

1 631 586-4220 1 800 645-5538


WWW.ALARMCONTROLS.COM EMAIL INFO@ALARMCONTROLS.COM

INSTALLATION INSTRUCTIONS

MODELS TS-10, TS-11, TS-12, TS-13



U.L. FILE SA32686

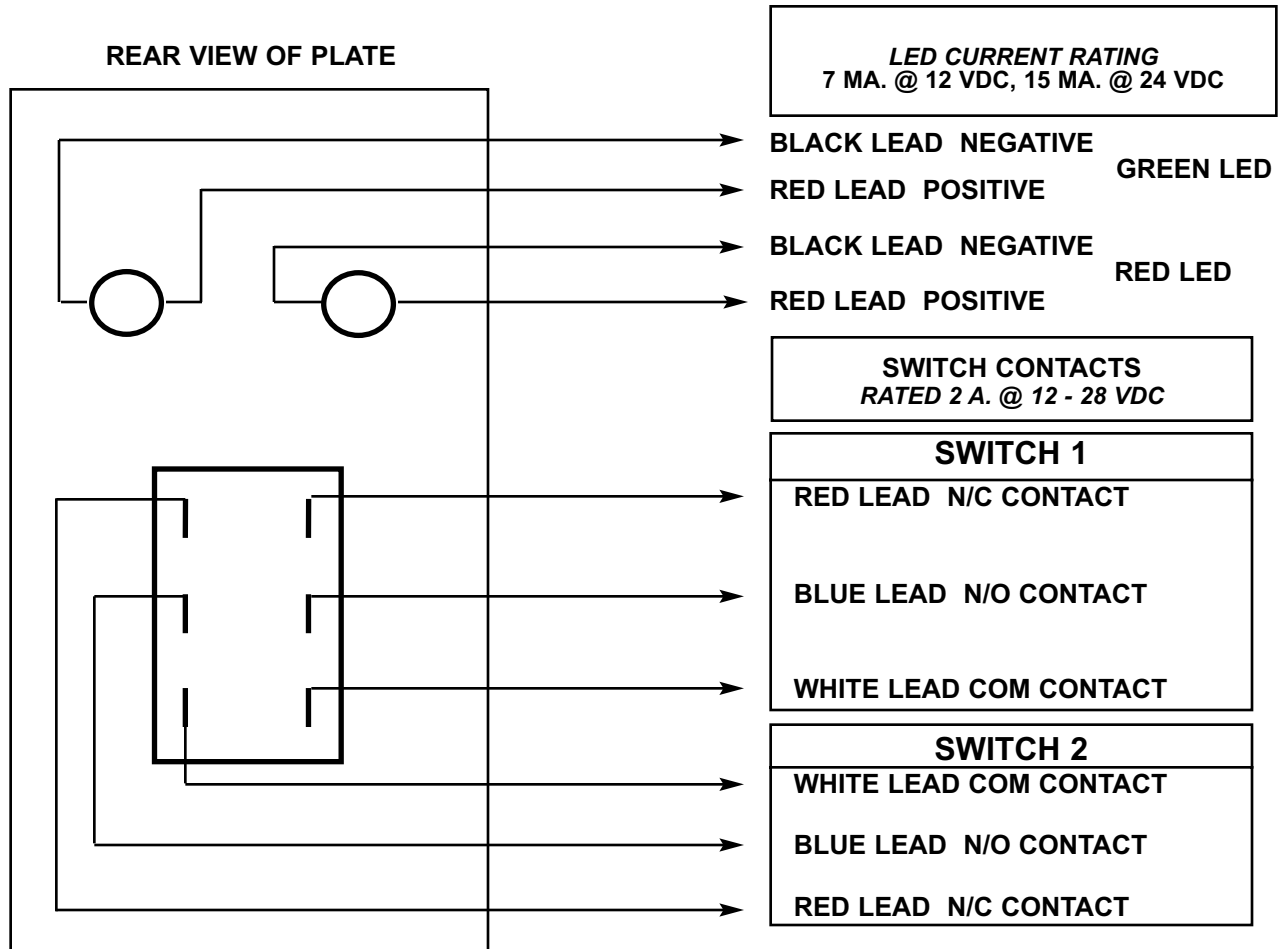

MOUNT WALLPLATE IN A VERTICAL POSITION

MODELS TS-10, TS-11, TS-12 & TS-13 SHOULD BE MOUNTED IN A 2.5 INCH ELECTRICAL BOX



ALARM CONTROLS CORPORATION
19 BRANDYWINE DRIVE P.O. BOX 280
DEER PARK, NY 11729

PH: 1 800 645-5538 1 631 586-4220 FAX ; 1 631 586-6500
WWW.ALARMCONTROLS.COM EMAIL: INFO@ALARMCONTROLS.COM