




IP CAMERA SETUP & FOCUSING ADAPTOR



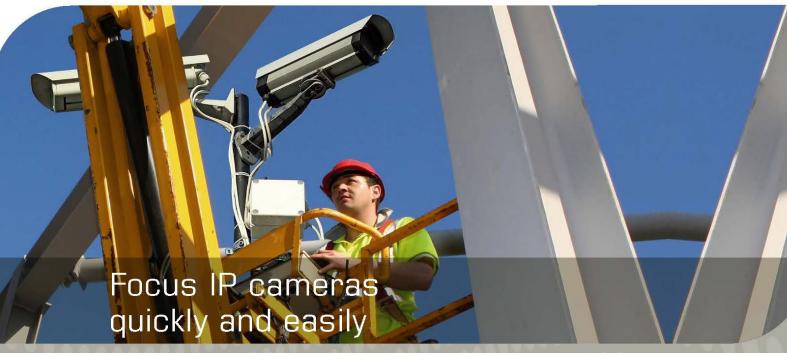

PINPOINT™ makes POE IP camera installation easy by powering the camera from POE, yet allowing direct connection of a laptop or netbook for local image display

- Allows local viewing of IP camera images on laptop/netbook close to camera
- Enables rapid and precise adjustment of lens focus and viewing angle
- Uses Power over Ethernet from the network no local power required
- Increases installation speed and efficiency reduces time on site
- Low cost re-useable device an essential installation too
- Installs in seconds removes in seconds





## VERACITY-VAD-PP

Product Code

Network connections : 3 1 : POE in (RJ45 socket) 2 : POE out + Ethernet (RJ45 plug on flying lead) 3 : Ethernet (RJ45 socket - crossover incorporated) Ethernet interface : 100BaseT Power requirements : Power over Ethernet Standard POE - IEEE 802.3af, POE Plus - IEEE 802.3at and most non-standard POE up to 30 watts LED Indicator : Indicates POE present : Solid moulded unit Enclosure type Dimensions : 65mm (160mm inc. lead) x 32mm x 20mm Operating Temperature : -10°C to 70°C Weight : 58g Compliance : CE and FCC exempt, RoHS compliant

: VAD-PP

