


Full HD 1080p 2MP Indoor/Outdoor Bullet IP Camera with Built-In Heater

VIP2B1M 3-9mm auto iris varifocal motorized lens, dark grey housing

Features

- Supports up to Full HD 1080p @ 30fps
- Built-in standard PoE (IEEE 802.3af)
- True Day/Night operation (IR cut filter)
- Built-in IR LEDs
- IR Range: 80' (depending on scene reflection)
- Motorized lens for remote focusing
- Supports H.264, MPEG4, and MJPEG codecs
- Micro SD card slot (card not included)
- IP67 compliant
- ONVIF Profile S listed*
- 2 year warranty

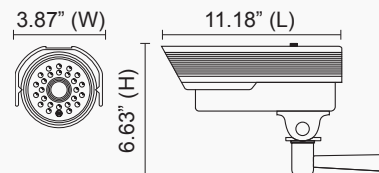

Camera Specifications

Image Sensor Progressive scan 1/2.8" CMOS, 2.0MP
Maximum Resolution 1920x1080
Minimum Illumination..... F1.2, Color: 0.2 lux, BW: 0 lux
IR LEDs 32
IR Range 80' (depending on scene reflection)
Focus Motorized remote focus
White Balance Automatic, Manual
Exposure Control Yes
Digital Slow Shutter Yes
WDR/BLC BLC
Day/Night IR cut filter
DNR 2D

Video Specifications

Supported Resolutions . 1920x1080 / 1280x1024 / 1280x720 / 704x576 /
704x480 / 640x480 / 320x240 @ 30fps
Compression H.264 (HP/MP/BP), MPEG4 (SP), MJPEG
Bitrate Control VBR, CBR
Multiple Streaming 3 simultaneous profiles

Audio Specifications

Mono Input N/A
Mono Output N/A

External Terminal Specifications

Ethernet 10/100 Mbps
Alarm N/A
Video 3.5mm jack (test monitor)
Audio N/A
Power 2-pin terminal block
Storage Micro SD slot

Network Specifications

Protocols IPv4, IPv6, TCP, UDP, RTCP, RTP, RTSP, HTTP,
HTTPS, SMTP, FTP, DHCP, Bonjour

Network Specifications (continued)

DDNS support Speco DDNS (free of charge)
Security User ID & Password protection,
IP address filtering, HTTPS
User Access 10 simultaneous users
Performance may vary depending on
resolution and number of connections

System Specifications

PoE Standard (IEEE 802.3af)
Analytics Motion detection (8 regions)
Alarm Triggers Motion, on boot, network loss, manual
Alarm Events FTP video file upload, email image upload,
micro SD card recording, HTTP server, boost
Video Buffer Configurable pre-record & post-record
Image Settings Privacy mask

Client Specifications

Web Browser Support Windows (Internet Explorer 8 and up, Chrome, Firefox)
Mobile Apps Speco VIP (iPhone®, iPad® and Android™)
PC Application Speco VMS, SecureGuard®

Operating & Unit Specifications

Power Supply PoE, 12VDC (power supply not included)
Power Consumption 24W w/ heater & IR (heater only available with 12VDC)
6W w/ IR (heater off)
Operating Temperature. -4° F – 122° F / -22° F – 122° F (with heater)
Operating Humidity 0% – 90% RH
Unit Dimensions 3.87" (W) x 6.63" (H) x 11.18" (L)
Unit Weight 2.5 lbs.
Certifications FCC, RoHS
Included in Package Unit, CD (manual, software),
mounting template sheet, mounting screws

Free Apps with support for view on most smart devices

*visit www.specotech.com/onvif.html for latest ONVIF support. iPhone and iPad are trademarks of Apple Inc., registered in the U.S. and other countries. Android is a trademark of Google Inc. Speco Technologies is constantly developing and improving products. We reserve the right to modify product design and specifications without notice and without incurring any obligation. Spec Rev. 2/18/14



Optional Accessories



IPPOEINJ1295
12.95W
PoE Injector



VIPRC
Remote Control



PSDC24
12VDC
Power Supply