


HD 720p Indoor WiFi Cube IP Camera

VIP2C1N 2.6mm fixed lens, black and white housing

Features

- Supports HD 720p @ 30fps
- Maximum resolution of 2.0 megapixel (1600x1200)
- Supports WiFi network connection (IEEE 802.11 b/g/n)
- Supports H.264, MPEG4, and MJPEG codecs
- Micro SD card slot (card not included)
- ONVIF Profile S listed*
- 2 year warranty

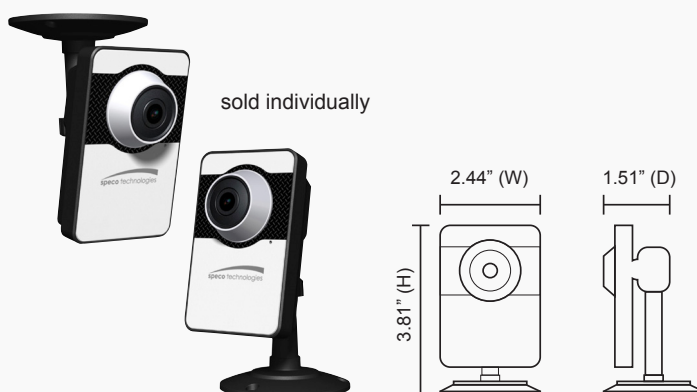

Camera Specifications

Image Sensor	Progressive scan 1/4" CMOS
Maximum Resolution	1600x1200 @ 15fps or 1280x720 @ 30fps
Minimum Illumination	1 lux
White Balance	Automatic, Incandescent, Fluorescent, Outdoor
Exposure Control	Yes
Digital Slow Shutter	Yes
WDR/BLC	N/A
Day/Night	N/A
DNR	2D

Video Specifications

Supported Resolutions	1600x1200 @ 15fps 1280x1024 / 1280x720 / 800x600 / 704x576 / 704x480 / 640x480 / 352x288 / 352x240 / 320x240 @ 30fps
Compression	H.264 (HP/MP/BP), MPEG4 (SP), MJPEG
Bitrate Control	VBR, CBR
Multiple Streaming	3 simultaneous profiles

Audio Specifications

Mono Input	N/A
Mono Output	N/A

External Terminal Specifications

Ethernet	10/100 Mbps
Alarm	N/A
Video	N/A
Audio	N/A
Power	5VDC jack
Storage	Micro SD slot

Network Specifications

Protocols	IPv4, IPv6, TCP, UDP, ARP, RTP, RTCP, RTP, RTSP, HTTP, HTTPS, SMTP, FTP, DHCP, UPnP, QoS, Zeroconf, Bonjour
-----------------	---

Free Apps with support for view on most smart devices

*visit www.specotech.com/onvif.html for latest ONVIF support. iPhone and iPad are trademarks of Apple Inc., registered in the U.S. and other countries. Android is a trademark of Google Inc. Speco Technologies is constantly developing and improving products. We reserve the right to modify product design and specifications without notice and without incurring any obligation. Spec Rev. 2/18/14



Network Specifications (continued)

WiFi	IEEE 802.11b/g/n
DDNS Support	Speco DDNS (free of charge)
Security	User ID & Password protection, IP address filtering, HTTPS
User Access	10 simultaneous users Performance may vary depending on resolution and number of connections

System Specifications

PoE	N/A
Analytics	Motion detection (8 regions)
Alarm Triggers	Motion, on boot, network loss, manual
Alarm Events	FTP video file upload, email image upload, micro SD card recording, HTTP server, boost
Video Buffer	Configurable pre-record & post-record
Image Settings	Privacy mask

Client Specifications

Web Browser Support	Windows (Internet Explorer 8 and up, Chrome, Firefox)
Mobile Apps	Speco VIP (iPhone®, iPad® and Android™)
PC Application	Speco VMS, SecureGuard®

Operating & Unit Specifications

Power Supply	5VDC (power supply included)
Power Consumption	600mA
Operating Temperature	32° F – 104° F
Operating Humidity	0% – 90% RH
Unit Dimensions	2.44" (W) x 3.81" (H) x 1.51" (D)
Unit Weight	2.64 oz.
Certifications	FCC, RoHS
Included in Package	Unit, CD (manual, software), power supply, mounting bracket, mounting screws

Optional Accessories



PSDC24
12VDC
Power Supply



IPPOEINJ1295
12.95W
PoE Injector



VIPRC
Remote Control