

VISTA:

Security Products by Securitron

550 Vista Blvd. Sparks, NV 89434 775-355-5625 www.securitron.com/vista

BRACKET

GDB


ASB

TYPICAL INSTALLATION

Glass Door Bracket

Aluminum Shim Bracket

APPLICATION




- Armature plate screws into bracket
- Includes rubber gasket and steel

tension plate


- VM300 and VM600 versions will alup to 9/16" thick glass, VM1200 will allow up to 5/8"
- ASB Used when a blade stop rethe Maglock to be lowered quires most aluminum frame glass as with doors
- Comes pre-drilled (lock specific) with countersinks for the mounting bolts and wire for VM600 & VM1200



- Extends narrow headers to permit proper mounting of VM600 & VM1200 Maglocks
- 2nd standard mounting bracket provided for additional strength

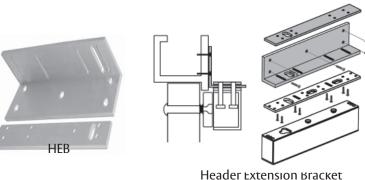

- SFP Used to extend the door stop
- Creates a flat mounting surface for the VM600 & VM1200 Maglock
- Available 1/4", 3/8" & 1/2" thickness, specify brushed aluminum or black
- 10.5" long x 1.25" wide

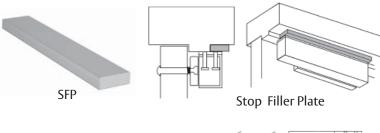

- - Z Bracket Kit
- Allows for precision adjustments





