

Description

Talk-A-Phone's WEBS-CM-2 WEBS Communications Module is an outdoor-rated security solution that can be used for a wide variety of applications where wide-area audio broadcast to line level audio devices is desired. The unit can be used as part of the Talk-A-Phone's Wide-Area Emergency Broadcast System (WEBS®) to notify large masses of people of an event with an intelligent message.

Talk-A-Phone's WEBS-CM-2 WEBS Communications Module is often used at university and college campuses, shopping malls, medical centers, industrial campuses and corporate facilities.



Features

- Send live or prerecorded audio messages to any line level audio device (e.g. fire alarm panel, paging system, high power speaker array) through WEBS Contact® Mass Notification Software
- Ethernet connectivity and full IP compatibility with existing routers and LAN infrastructure
- Additional Layer 2 switch Ethernet port to connect other devices (e.g. IP Video Camera)
- Configuration and firmware upgrades through Web GUI
- Auxiliary inputs and outputs to integrate with CCTV Cameras, Blue Lights, Access Control and Scream Alert®
- API/SDK available for third party integration

Specifications

Dimensions (W x D x H):	6.9 x 2.1 x 11.7 in. (176 x 53 x 297 mm)
Weight:	3.5 lbs. (1.6 kg)
Construction:	10GA (.1 in.) painted aluminum
Rating:	NEMA 4 construction with liquid tight cord grips
Storage Temperature:	-40° F to +149° F (-40° C to +65° C)
Operating Temperature:	-40° F to +131° F (-40° C to +55° C)
Relative Humidity:	Up to 95% non-condensing
Protection:	Circuit board conformal coated
Power:	Maximum total 9.6 watts, 12 VDC / 24 VAC / 24 VDC (a dedicated line regulated power supply is required), PoE (IEEE 802.3af)
Auxiliary Contacts:	3 Aux Inputs: dry contact, 10mA @ 8VDC 3 Aux Outputs: dry contact, 120mA @ 120VAC/DC
Network:	10/100 BaseT Ethernet, RJ45 connectors, Cat 5e or better
Programming:	Non-volatile Flash Memory programming and configuration through Web GUI
Configuration:	Static IP address provisioning and DHCP client. Monitoring via 3 rd party Syslog application.
Mounting:	Surface mount
Warranty:	2-year warranty

WEBS-CM-2 – WEBS® Communications Module

Accessories

Mass Notification:

Order **WEBS-CONTACT** Mass Notification/Polling software to broadcast live and pre-recorded audio and text messages through a wide variety of notification mediums. Includes SMS, Email, RSS, and audio broadcast notifications (requires a VOIP-500 series phone or WEBS-CM-2).


Ceiling Speaker:

Order **S-8318B** 8 Ohm indoor ceiling speaker for indoor paging applications. Each individual WEBS-CM-2 can broadcast to a single zone consisting of up to seven S-8318B ceiling speakers. For larger paging applications, see amplifier options.

Amplifier:

Order **WEBS-AMP-2** two-channel amplifier to broadcast to a single zone consisting of up to twenty (20) S-8318B ceiling speakers.

Dimensional Diagram

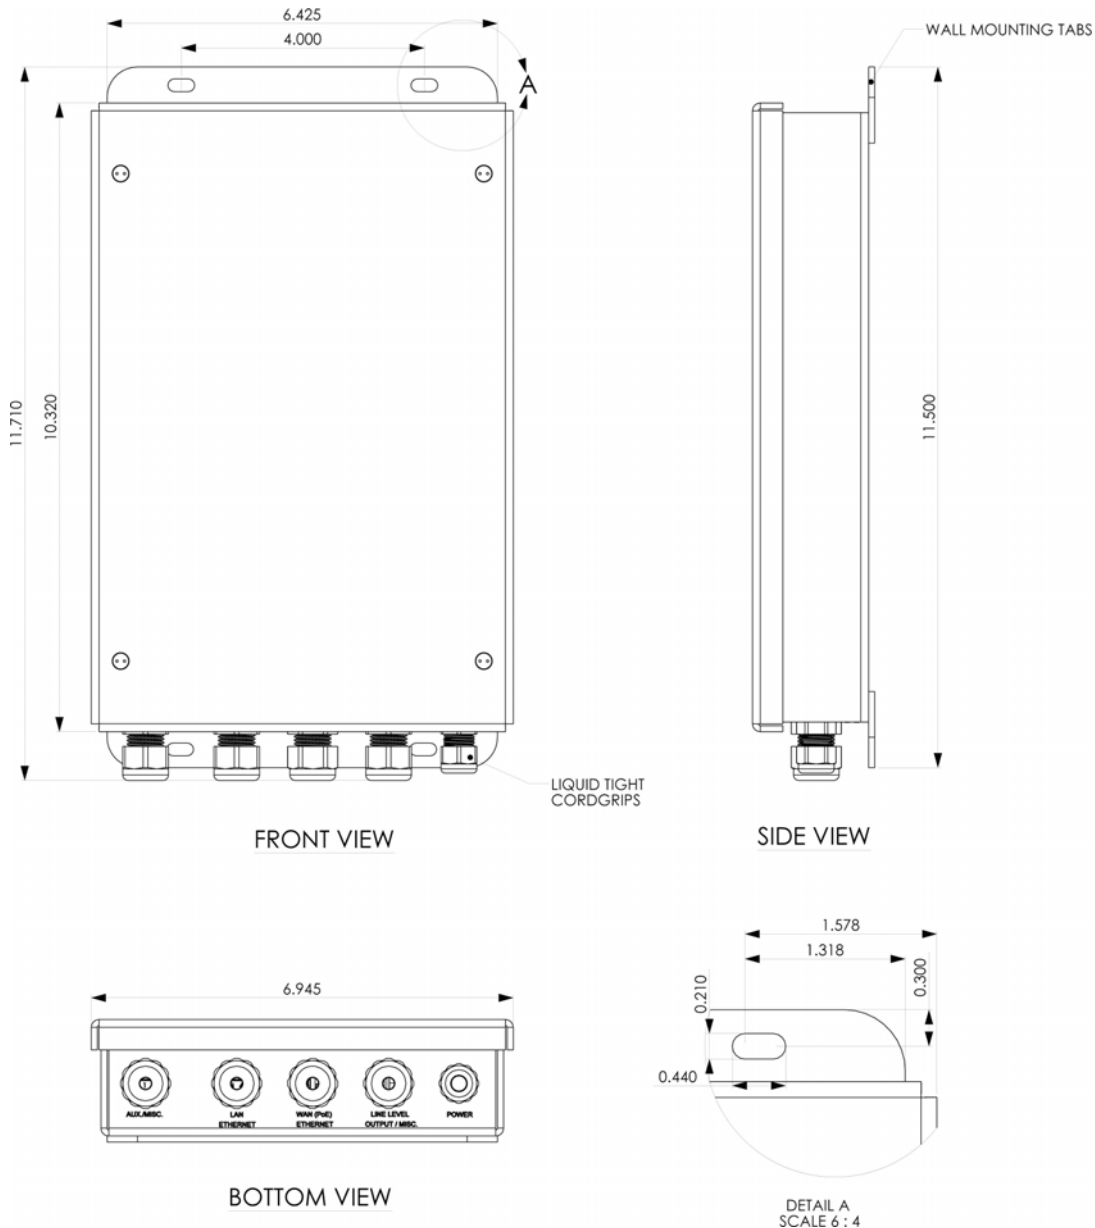

All dimensions are in inches and are provided for reference only.

Rev. 11/28/2012