

DESCRIPTION:

The IX-DF-2RA is an IP addressable stainless steel, flush mount video door station with standard and emergency call buttons. Both buttons feature ADA compliant lettering and Braille signage. A call status indicator is included to meet ADA rescue assistance requirements.

The emergency button will trigger two programmable relay outputs for activation of external systems or devices and can be programmed to call a different master station than the standard call button.


The built-in camera provides an 87° viewing angle. The unit has a stainless steel faceplate and includes tamper resistant screws.

The IX-DF-2RA is compatible with the IX Series. Each station can be assigned one of three priority call queuing levels. The station is 802.3af PoE compliant.

Flush mount with supplied back box or surface mount with the SBX-ISDVFRA.

FEATURES:

- Audio communication and visual identification of calling area
- Two call buttons: Standard and Emergency
- ADA compliant lettering and Braille signage
- LED call status indicator
- Red mushroom button for emergency call
- Stainless steel faceplate with tamper resistant screws
- ONVIF Profile S compliant

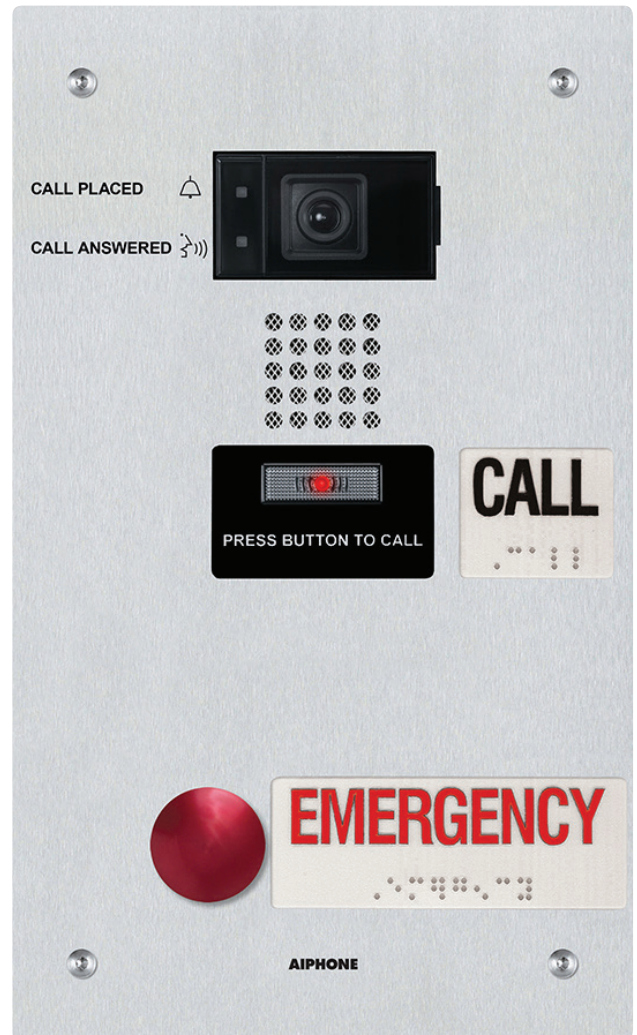

IX-DF-2RA

IP Addressable Dual-Call Button Video Emergency Station for the IX Series

FEATURE CALL-OUT DEFINITIONS:

- [1] Camera
- [2] Microphone
- [3] Call status indicators
- [4] Speaker
- [5] Call button
- [6] White LED illuminator
- [7] Call signage with Braille
- [8] Emergency button
- [9] Emergency signage with Braille

SPECIFICATIONS:

- Power Source: 802.3af PoE compliant
- Communication: Open voice, hands-free
- Camera: 1/4" color CMOS VGA
- Min. illumination: 5 Lux
- Wiring: CAT-5e or CAT-6
- Wiring distance: 330'
- Door release: 24V AC/DC, 500mA (N/O, COM, N/C)
- Operating Temp: 14° - 140°F (-10° - 60°C)
- Ingress Protection: IP55
- Dimensions: 11-11/16"H x 7" W x 2"D

FEATURE CALL-OUTS:

