


LOCK FUNCTION		OUTSIDE	INSIDE
09	●	●	●
16	●	●	●
07	●	●	●
18	●	●	●

# DOOR PREPARATION CHART

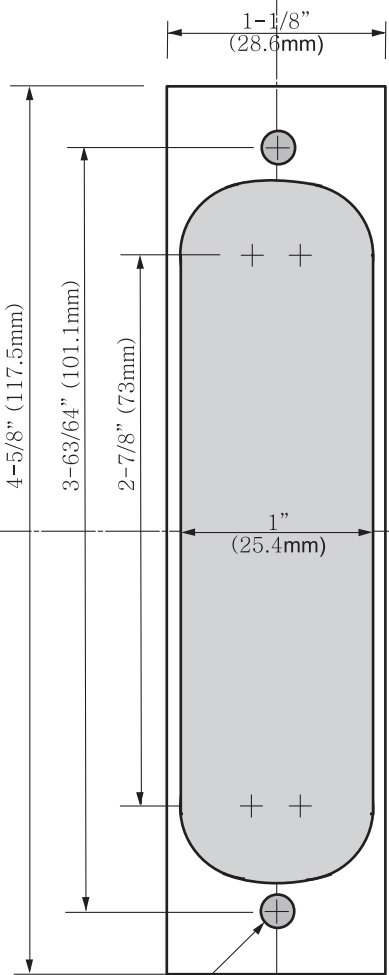

2 x 12-24 TAP FOR METAL DOORS


Of Lock And Door Thickness



7/32" (5.5mm)

# DRX TEMPLATE

HEAVY DUTY DEADBOLT

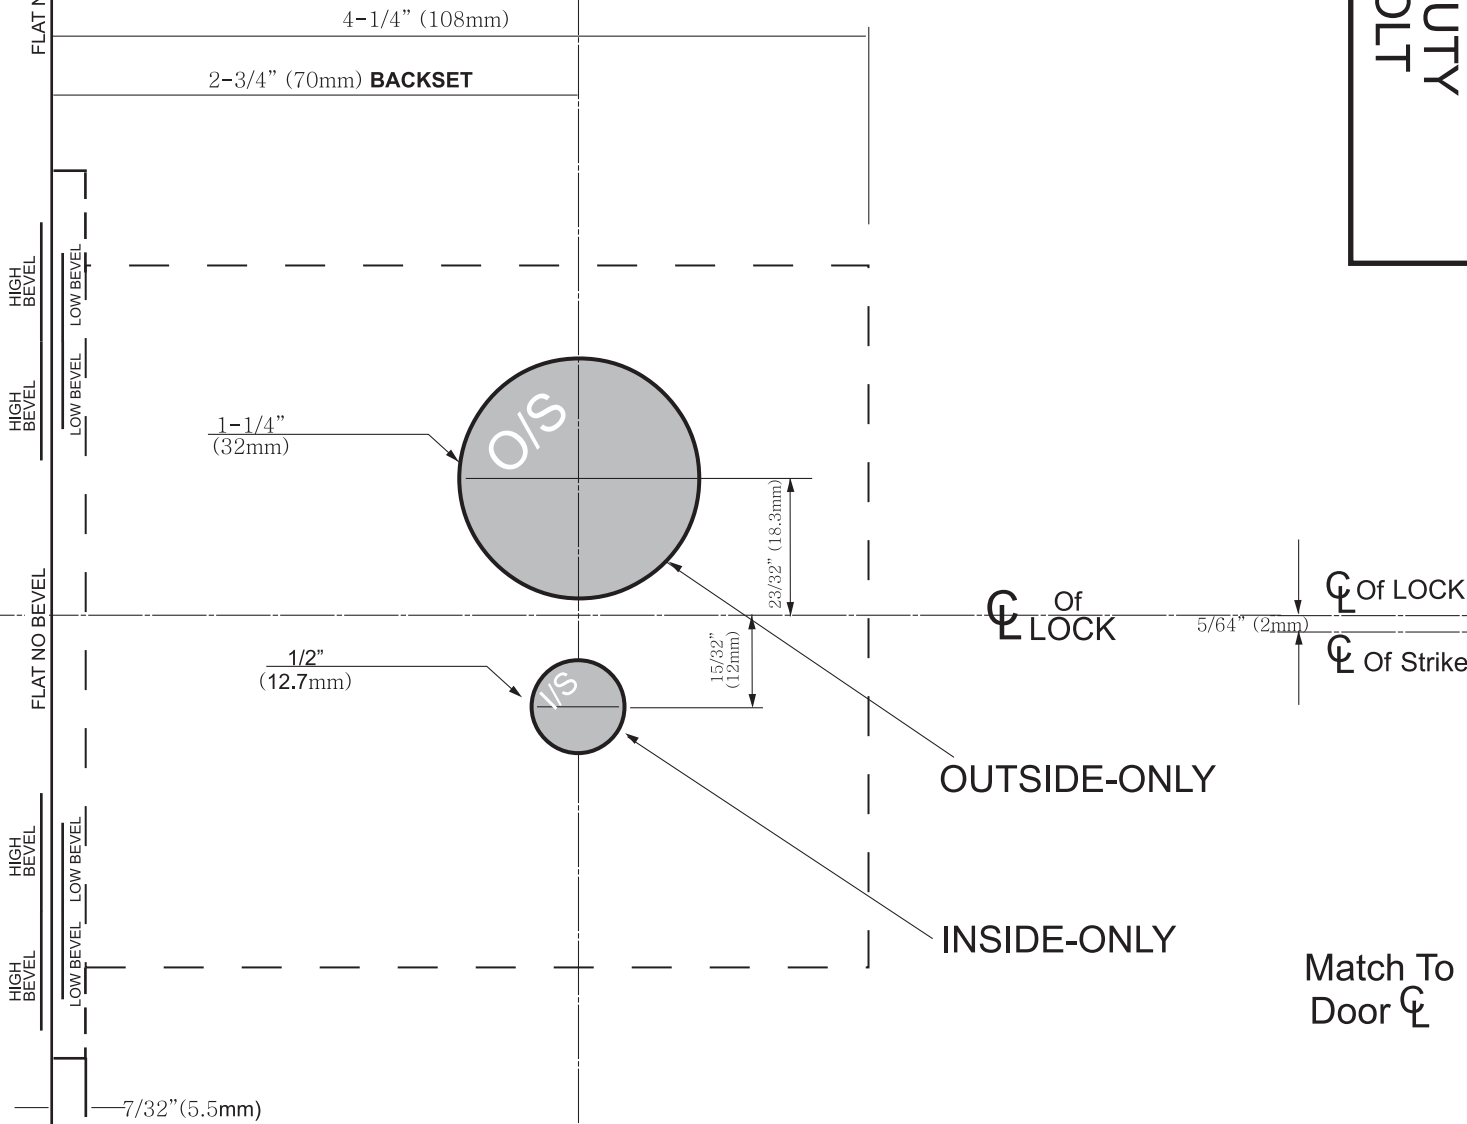

OUTSIDE-ONLY

INSIDE-ONLY

Match To Door  $\text{CL}$

1" 25.4mm

If This Measures 1" or 25.4mm Scale Is Correct

## LOCATOR POINT


MATCH WITH VERTICAL LINE DRAWN ON DOOR

### RESPONSIBILITY

Door and Frame Manufacturers are responsible for providing adequate construction or reinforcements for proper installation of hardware shown. All architectural builders hardware must be installed on properly reinforced doors and frames, regardless of the type, material or method of construction.

**FOR OPPOSITE HAND, PLEASE SEE REVERSE SIDE**

RECESS TO FIT STRIKE PLATE

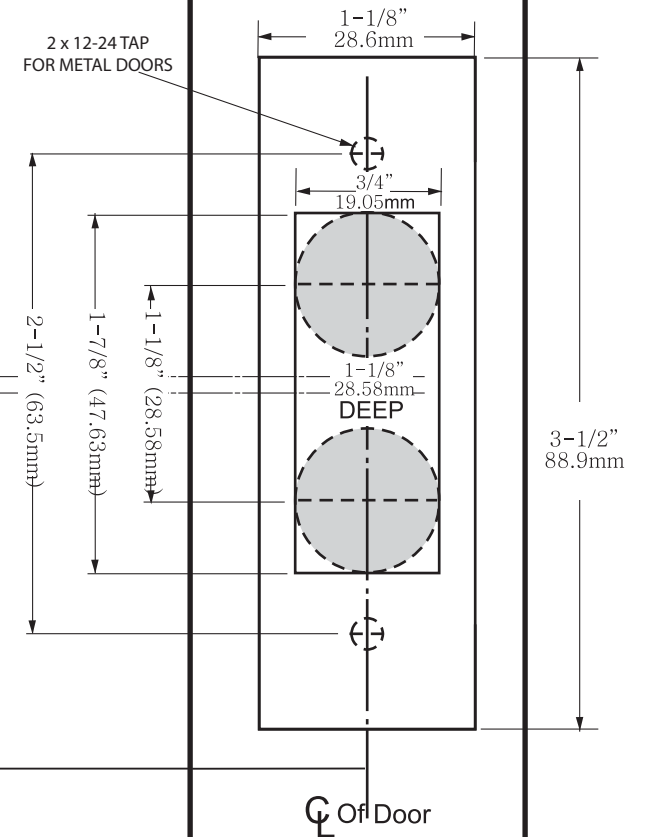

DOOR FRAME VIEW

**STRIKE TEMPLATE**