

# Micro Cabinet EMLock® **Security Made Easy**

SDC's 1583 Micro Cabinet EMLock® is a compact specialized electromagnetic lock that produces 300lbs. of holding force. Versatile mounting capability with face drilled and surface mounting holes. The 1583 operating voltage is field selectable for either 12/24 VDC. Aluminum housing is standard.

# **Applications**

- Cabinets
- **Drawers**
- Display cases
- Machine equipment housings
- Gun safes
- Package pass through doors
- Dark rooms

### **Failsafe Operation**

Security and safety with no moving parts. Positive and instantaneous failsafe un-locking operation is guaranteed.

#### **Easy Installation**

Compact size allows easy installation in small cabinets or restricted spaces. No special tools are required.

#### **Durable, No Maintenance**

With nothing to wear out and no moving parts, the 1583 EMLock® is virtually maintenance free.

# **Solid State Protection**


The EMLock® provides spike and surge protection for solidstate devices on the same line.

## **Features**

- 300lbs. of holding force
- An electronics module provides spike and surge protection for the EMLock®
- Dual voltage and modular design
- Strong enough even for large cabinet doors
- Protection of the EMLock® and other devices on same line without additional parts
- Operates on 12 or 24VDC







# **Specifications**

1583V EMLock® 300lbs. holding force, 12/24VDC

**Dimensions** 

EMLock®: 6-1/2"L x 1-1/8"W x 1-1/2"H

(159 x 29 x 38mm)

5-1/8"L x 1-1/8"W x 0.25"H Armature:

(130 x 29 x 6mm)

**Electrical Specifications** 

Connection: Wire leads with in-line spike and surge protection

Input Voltage: 12 or 24 VDC +/- 10%

500mA @ 12VDC Current:

250mA @ 24 VDC

Battery back up capability when used with a power supply and battery,

Note: Not recommended for life safety on pedestrian doors.





Figure 1. 1583 EMLock® Dimensions

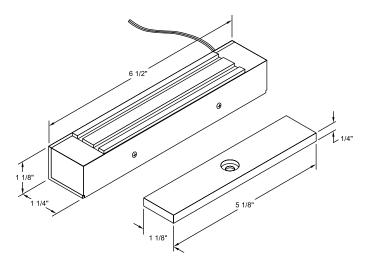


Figure 2. 1583 EMLock® with AC transformer, rectifier, key switch and LED (green when locked, red when unlocked)

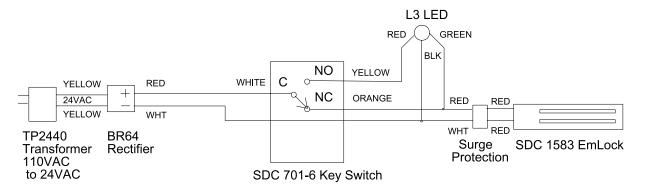


Figure 3. 1583 EMLock® with DC plug-in transformer and SDC 917 keypad

