



310-4



310-4S

310-4 Series

The industrial grade, **fire-rated solution** for 1/2" or 3/4" rim exit devices

The 310-4 is a 3 hour fire-rated, industrial grade electric strike designed for extreme heavy duty applications. The all stainless steel construction of this device makes it ideal for high abuse applications that would disable other electric strikes. The 310-4 has a unique 3/4" face plate with an integrated 1/4" base shim that can be removed in the field to accommodate rim exit devices with a 1/2" or 3/4" throw latchbolt.

310-4

For up to 3/4" Pullman style latchbolts on single doors


PK keeper standard

310-4S

For Squarebolt® style rim exit devices such as;

- Corbin Russwin® ED4200S, ED5200S and ED5200SA SecureBolt™
- Yale® 7150(F), 7250, 7270M(F) Squarebolt® Exit Devices

SK keeper standard

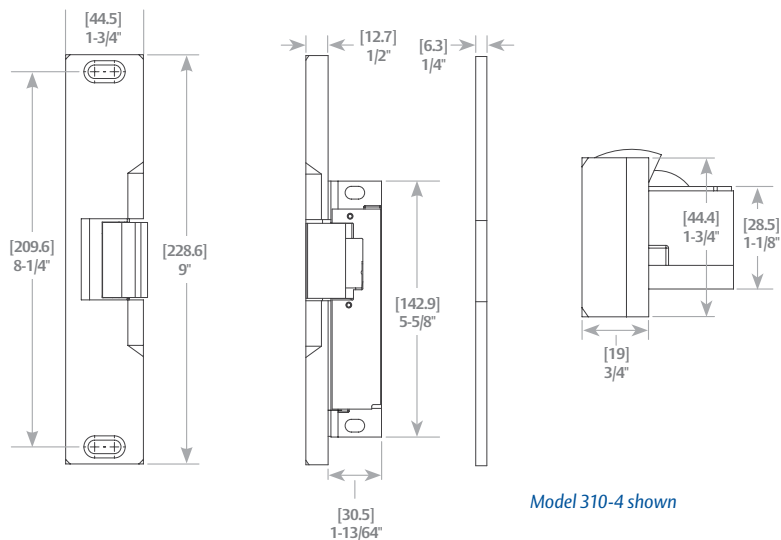

Model 310-4 shown

Specifications

- UL 10C, 3-hour fire-rated (fail secure only)
- CAN4-S104 (ULC-S104) fire door conformant
- UL 1034, burglary-resistant listed
- UL 294 (6th Edition) listed
- ANSI/BHMA A156.31, Grade 1
- NFPA-252 fire door conformant
- ASTM-E152 fire door conformant
- RoHS compliant

Electrical (continuous duty)

- .51 Amps at 12 VDC
- .25 Amps at 24 VDC

Standard Features

- Integrated shim for quick customization of faceplate thickness (1/2" to 3/4")
- Tamper-resistant, heavy duty construction
- Constructed entirely of stainless steel for strength and corrosion resistance
- Static strength 1,500 lbs.
- Dynamic strength 70 ft-lbs.
- Endurance rating 500,000 cycles
- Integrated ramps for better deadlatch handling
- Set screws for horizontal lockdown
- In-frame horizontal adjustability
- Wider faceplate (1-3/4") for greater versatility
- Non-handed
- Fail secure
- Plug-in connector
- Five-year limited warranty

Optional Features

- Fail safe
- LCBMA »** Latchbolt & Locking Cam Monitor with Auxiliary Switch

Accessories

- SMB »** Surface mounting box
- 2001-1 »** Wire-in bridge rectifier
- 2001M »** Plug-in bridge rectifier
- 2004M »** ElectroLynx® adapter
- 2005M3 »** SMART Pac® III
- 2006M »** Plug-in buzzer

Finishes

- 630 »** Satin stainless steel
- 605 »** Bright brass
- 606 »** Satin brass
- 612 »** Satin bronze
- 613 »** Bronze toned
- 629 »** Bright stainless steel

RIM EXIT
DEVICES

FIRE RATED



GRADE 1

UL 1034
BURGLARY
LISTED