

Detex Corporation, 302 Detex Drive, New Braunfels, Texas 78130-3045 (830)629-2900 / 1-800-729-3839 / Fax (830)620-6711 E-MAIL: detex@detex.com INTERNET: www.detex.com

INSTALLATION INSTRUCTIONS FOR

03R ADVANTEX® TRIM FOR NARROW STILE (60 SERIES) CVR APPLICATIONS



03R Trim for 60 Series
Concealed Vertical Rod Exit Device
60 / F60 / 61 / F61 / 62 / F62 / 63 / F63 Series

Drawing no. 105106


TOOLS AND SUPPLIES

Safety Glasses


(Always put on safety glasses prior to beginning installation of unit)

Pencil
Center Punch
Hammer
Power Drill
1-1/4" Hole Saw
Drill Bit & Tap Set

Screw Driver (Phillips Drive)
Tape Measure



Hex standoff p/n: 105105



Trim housing p/n: 105104-X

Must use BP12 backplate (supplied with exit device)

Tailpiece for 2-1/4" thick door provided p/n: 105239-1

Screws & lockwashers provided with cylinder*

Mounting screws

3 lengths provided (qty 2 each)

Tailpiece assembly for 1-3/4" to 2" thick doors


p/n: 105238-1

p/n: 105622-124 (1-1/2" long for 1-3/4" door) p/n: 105622-128 (1-3/4" long for 2" door) p/n: 105622-132 (2" long for 2-1/4" door)


Owner's Copy

1. PREPARE THE DOOR - DEVICE SIDE

If not already done, prep the door per the instructions provided with the exit device.




2. TRANSFER DEVICE CENTERLINES TO TRIM SIDE OF DOOR

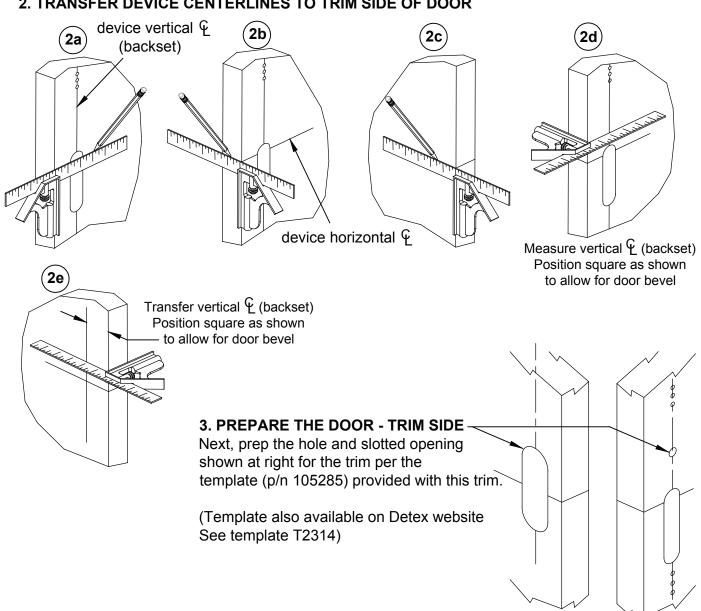

4. PREPARING THE CYLINDER:


Cut rim cylinder tailpiece as shown below.



5. ASSEMBLE THE TRIM:

Assemble the cylinder (with key removed), trim housing & tailpiece assembly.

The unit comes assembled with the tailpiece used on 1-3/4 to 2" thick doors. For 2-1/4" thick doors, replace with the longer tailpiece provided (p/n 105239-1).

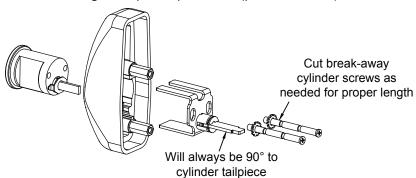

6. GO BACK AND FOLLOW EXIT DEVICE INSTRUCTION STEPS up to, but not including ASSEMBLE DEVICE TO DOOR. Trim must be installed BEFORE device is assembled to door.

7. INSTALL TRIM ON DOOR

With the required BP12 backplate secured, use the appropriate length screws in the TOP HOLE in each pair of backplate holes above and below the cam (as shown) to install trim.

