


## Bullet Cameras with Motion Detection & White LEDs

**VL5700BPVF** 4-9mm auto iris varifocal lens, dark grey housing

**VL5700BPVFW** 4-9mm auto iris varifocal lens, white housing

### Features

- 1/3" Sony Super HAD II™ CCD
- 600 TV lines of resolution
- True Day/Night capability
- Digital Deterrent®: white LEDs are turned on when motion is triggered
- 14 IR LEDs & 2 white LEDs
- ICR-IR cut filter removable
- 12VDC / 24VAC dual voltage operation
- 5 year warranty

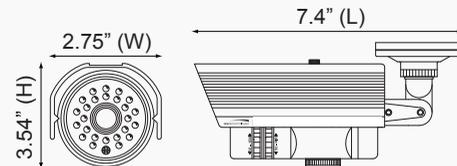

### Specifications

Image Sensor .....	1/3" Sony Super HAD II™ CCD
Resolution.....	600 TV lines
Minimum Illumination.....	0.000006 lux (IR LED on)
Effective Pixels .....	768 (H) x 494 (V)
Total Pixels .....	811 (H) x 508 (V)
Scanning System.....	2:1 interlace
Number of LEDs.....	IR: 14, white: 6
IR Range .....	Indoor 65 ft. / Outdoor 32 ft. (depending on scene reflection)
IR LED Wavelength .....	850nm
Synchronization .....	Internal / Line Lock (option)
OSD.....	Available
Backlight Compensation....	Off / HSBLCL / BLC
S/N (Y signal) .....	52dB (AGC off, weight on)
White Balance .....	ATW / AWB / Manual / AWC - Set
Electronic Shutter Speed....	Auto: (1/50 sec., 1/60 sec. - 1/100,000 sec.)
Sense-Up.....	Off / Auto (selectable limit x2 - x256)
AGC.....	High / Middle / Low / Off
3DNR.....	On / Off (1-50 level adjustable)
DWDR .....	Indoor / Outdoor / Off
Motion Detection.....	On / Off (4 zone)

Privacy.....	On / Off (8 zone)
Mirror .....	Off / Mirror / V-Rev / Rotate
Freeze .....	On / Off
Sharpness .....	0-31' (level adjustable)
Day/Night.....	Color / BW / Auto / EXT
Digital Zoom .....	On (32x) / Off
Defect Compensation.....	128 Points
Heater.....	1 EA
Power Consumption .....	12VDC, 220mA (CDS off, heater on) / 400mA (CDS off, heater on) 24VAC, 100mA (CDS off, heater on) / 150mA (CDS off, heater on)
Power Supply .....	12VDC / 24VAC dual voltage operation (power supply not included)
Operating Temperature/ Humidity.....	14° F – 122° F / RH 95% max.
Storage Temperature/ Humidity.....	-4° F – 140° F / RH 95% max.
Dimensions.....	2.75" (W) x 3.54" (H) x 7.4" (L)
Weight .....	1.1 lbs.



Speco Technologies is constantly developing and improving products. We reserve the right to modify product design and specifications without notice and without incurring any obligation. Spec Rev. 5/30/13

### Optional Accessories



**INTCM**  
Corner/Pole  
Adaptor



**PSW4**  
24VAC  
Power Supply



**PSW5**  
12VDC  
Power Supply