



Product Data Sheet

1078CT-N

Recessed contact for steel doors with screw terminals

Steel door applications

The Sentrol 1078(C/T) series steel door contacts are designed specifically for use in the steel doors commonly found in commercial building applications. Many models including, wide gap, SPDT and biased for high security applications make the 1078 series the most widely used and comprehensive line available.

Easy Installation

The unique housing design features a rugged body construction with flexible ribbed sides for quick, secure installation without gluing. The magnet housing isolates the magnet from the surrounding steel for maximum gap distances, both make and break.

Durability and dependability

The Sentrol high performance magnetic contacts have been designed to facilitate installation and ensure durability and dependability. Most are conservatively rated at 10,000,000 cycles, guaranteeing a long life. Every reed connection is hand soldered and each magnetic contact is tested before they leave the factory, 100% of the time.

High quality components and materials

Reed legs are plated with rhodium or ruthenium, and hermetically sealed in dry nitrogen. This offers superior protection against sticking and provides a moisture free environment therefore preventing corrosion.



Standard Features


- Designed for use in steel doors
- Provides consistent connection
- Terminals accept 0,3 mm² till 2 mm² wires
- Easy to install
- Drastically reduces installation time

1078CT-N

Recessed contact for steel doors with screw terminals

Specifications

Gap distance (max)	9 mm
Connections	Screw terminals
Contact	NC
Supervised loop	No
Dimensions (Ø x L)	
Contact	Ø 19 x 41 mm
Magnet	Ø 19 x 40 mm
Color	White

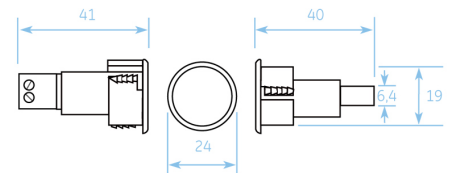

Ordering Information

Part No.	Description
1078CT-N	Recessed magnetic contact for steel doors with screw terminals, white

