
10 GHz 50/125µm Multimode Duplex LC-SC Fiber Optic Jumper

PRODUCT SPECIFICATION

Package includes:

- A. 10 GHz 50/125 μm Multimode Duplex LC-SC Fiber Optic Jumper, 1 pc
- B. Test Results Label, 1 pc

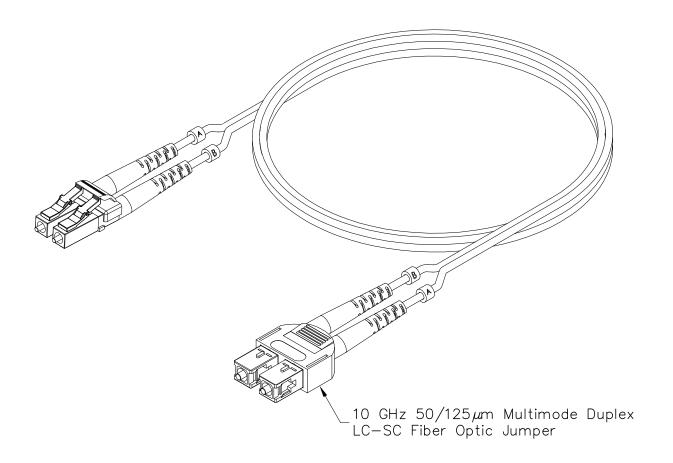


Features and Benefits:

- Made from OFNR riser rated cables, exceeding all industry requirements
- Laser optimized fiber optic cable designed for 10 GHz applications
- Used with ICC fiber optic products
- Available in 1, 2, 3, 5, 7 and 10 meters
- Test results included

JUMPER	, LC-SC, DUPLEX, 5	iO/125μm, 10G	R
ITEM NO.	ICF0J2G7XX	REV. C	Premium Products
DWG NO.	PSF0J2G700	PAGE NO. 1	Proven Pe



 $\textbf{CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com / 14700 Alondra Blvd., La Mir$



NOTE: UNLESS OTHERWISE SPECIFIED

- 1. CABLE
 - A. COLOR: AQUA
 - B. FIBER COUNTS: 2 FIBER ZIPCORD
 - C. FIBER TYPE: LASER OPTIMIZED MULTIMODE $50/125\mu m$
 - D. ATTENUATION: 3.5/1.0 dB/km @ 850/1300nm
 - E. BANDWIDTH: 200/500 @ 850/1300nm
 - F CABLE DATA:
 - -CABLE DIAMETER: .079 in (2.0 mm)
 - -WEIGHT: 12 lb/kft
 - -BEND RADIUS: 1.2 in MIN -LOADING: 135 lb MAX -IMPACT CYCLE: 1500
- 2. LC CONNECTOR:
 - A. FERRULE: ZIRCONIA
 - B. INSERTION LOSS: .2 dB TYPICAL, .3 dB MAX
 - C. REFLECTION: N/A
- 3. SC CONNECTOR:
 - A. FERRULE: ZIRCONIA
 - B. INSERTION LOSS: .2 dB TYPICAL, .3 dB MAX
 - C. REFLECTION: N/A
- 4. LENGTH: XX=01, 02, 03, 05, 07 & 10

ITEM NUMBER	L
ICF0J2G701	1 METER ± 10 CM
ICF0J2G702	2 METER ± 10 CM
ICFOJ2G703	3 METER ± 10 CM
ICF0J2G705	5 METER ± 10 CM
ICF0J2G707	7 METER ± 10 CM
ICF0J2G710	10 METER ± 10 CM

JUMPER	, LC-SC, DUPLE	ΣΧ, 50/125μm, 10G
ITEM NO.	ICFOJ2G7XX	REV. C
DWG NO.	PSF0J2G700	PAGE NO. 2



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com