

89A-L SERIES MULTIMODE



Single Fiber Bi-directional Transceivers Audio and Contact Closure System Interface For iPhone Intercom LEF Systems

FEATURES:

- Bi-directional Audio and Contact Closure Transceivers
- Diagnostics: Power and Optical Presence
- Voice Operated (VOX) Transmission
- FM Modulated Audio

SPECIFICATIONS:

Audio:

Bandwidth 300 Hz to 10 KHz
 THD @ 1 KHz 2%
 SNR 50 dB
 Connector 5 Pin Screw Terminal

Contact Closure:

Input Switch Closure to Ground
 Output Dry Contact
 Response Time 2 ms
 Connector 5 Pin Screw Terminal

Optical:

Wavelength 850/1300 nm
 Loss Budget (62.5/125µ) 12 dB
 Connector ST

Temperature (Operating):

-20°C to +70°C, non-condensing

Power Supply:

Module - 24 VAC Center Tap (AFI Part#: PS-24-CT-T)
 Power Consumption 5 Watts
 Rack Card - (See AFI Part #: SR-20D/2)
 Power Consumption 3 Watts

Size:

Module - 5¾" x 6¾" x 1⅜"
 Rack Card - 6½" x 1" x 5"


ORDERING INFORMATION:

MT = Module Transmitter - Station
 MR = Module Receiver - Master
 RT = Rack Card Transmitter - Station
 RR = Rack Card Receiver - Master

Example: MT-89A-L to RR-89A-L



The American Fibertek 89A-L Series transmits one channel of high-quality low distortion bi-directional audio/contact closure on one multimode optical fiber. Designed to be completely transparent, the system's field microphone and audio level can be adjusted to balance and optimize signal levels. Diagnostic indicators provide a quick visual indication of system status. Equipment may be ordered as stand alone modules or rack cards that are mounted in the American Fibertek Card Cages: SR-20D/2 or SR-20R/1.

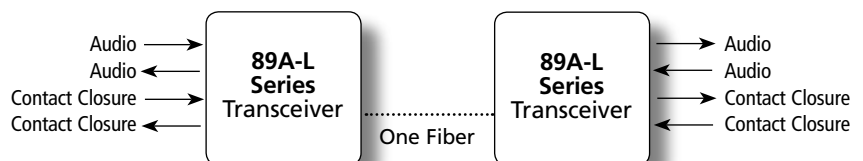

SEE WEBSITE FOR CURRENT RoHS PRODUCT AVAILABILITY