

## 5100 Series

### Electric Strikes for Cylindrical Locksets


#### Overview

The Von Duprin 5100 Electric Strike has been designed and manufactured to meet the needs of locksmiths and security professionals. This easy-to-install electric strike was created for medium duty applications, specifically to control traffic flow through interior and exterior openings in retail and commercial environments.

The 5100 Electric Strike is designed for maximum flexibility. It comes standard with three faceplates for hollow metal, wood or aluminum frames in every box. The internal 12/24VDC solenoid provides additional versatility. While the adjustable keeper improves fit for applications with weather stripping or tight door preps. Furthermore power failure mode is field selectable fail safe/fail secure.

With multiple faceplates and flexible options the 5100 provides added convenience by ensuring the right parts are in the box to get the job done. This reduces labor expense and reduces return trips to the job site.

The 5100 was developed with Von Duprin's high standards and engineering expertise. Its heavy duty construction & tamper resistant design is able to withstand abuse. The 5100 is tested to over one million cycles and provides 1300 lbs. holding strength.

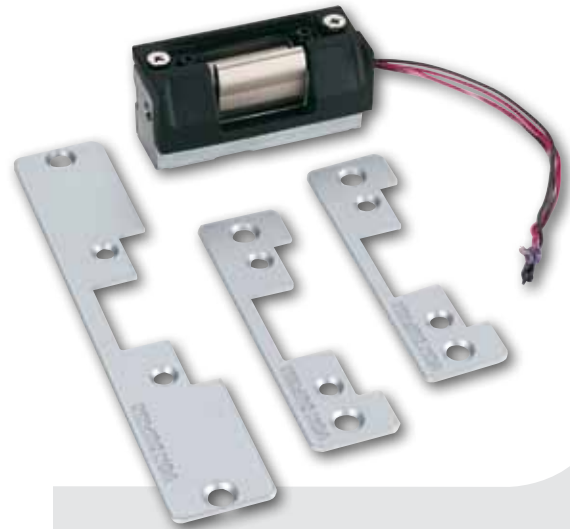

#### Features and Benefits

- Three faceplates standard in every box
- 12/24 dual-voltage
- Fail-safe/fail-secure
- Adjustable keeper
- Internal solenoid
- Non-handed
- Backbox depth of 1 11/16"
- Keeper depth of 1/2"
- Mounting tabs
- Retrofit kit
- Illustrated installation instructions
- Tamper resistant
- 1 year electrical product warranty
- Continuous duty operation
- Heavy duty construction
- Meets BHMA A156.31, Grade 1 for endurance and dynamic strength, and Grade 2 for static strength
- Static strength 1300 lbs.
- Dynamic strength 70 ft-lbs.
- Endurance 1,000,000 cycles


## Technical Specifications

Power Options		
<b>DC: Regulated Power Supplies (Recommended)</b>	PS902 Power Supply	
<b>AD/DC: Conversion</b>	Von Duprin SO-24 Kit	
	<b>12VDC</b>	<b>12VDC</b>
<b>Resistance (Ohms)</b>	32	128
<b>Power (watts)</b>	4.5	4.5
<b>Current (amps)</b>	0.38	0.19
<b>All specs ± 10% @77°F/25°C</b>		

## Solenoid Power Requirements

12VDC, 0.38 A | 24 VDC, 0.19 A

For DC operation, Von Duprin PS902 series power supply is recommended.  
For AC operation, Von Duprin SO24 Kit is recommended.

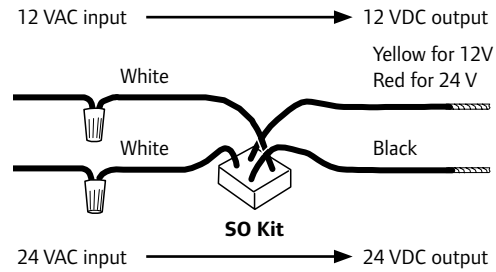


## Model Specifications


Model #	5100
Latchbolt Throw	1/2" to 5/8" with 1/8" door-frame gap
Face Plate Length	4-7/8" or 7-15/16"
Depth	1-11/16"
Lockset	Cylindrical
Door/Frame Type	Hollow Metal, Aluminum & Wood
Number of Doors	Single
Certifications	ANSI/BHMA 156.5 Grade 1, UL 1034 Burglary Listing
Application Notes	Versatile electric strike for aftermarket, covering multiple applications in one sku.

Lockset Compatibility: Keeper depth of 1/2" is sufficient to accommodate all cylindrical locks up to 5/8" throw and most aluminum narrow stile deadlatches.

## 12 VDC Strike Wiring

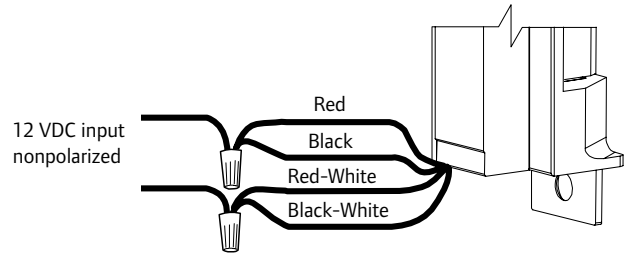

## 24 VDC Strike Wiring

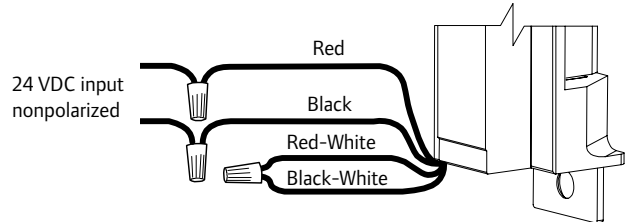

## Ordering Information

Model	5100	S024
Rectifier Kit *	1	2
Model	1	2
Rectifier Kit *	1	2

Selections Correspond With the Numbers Above

\* Optional

### 1 Model

5100 Electric Strike for Cylindrical Locksets

### 2 Rectifier Kit (Optional)

S012 Converts 12 VAC voltage to 12 VDC to operate the solenoid  
S024 Converts 24 VAC voltage to 24 VDC to operate the solenoid

Standard Features:

- 24 volts DC
- Fail-secure
- Field convertible to Fail-safe

